

RAL 9016 RAL 9005 RAL 9006

# SNOW IP54/40

# 05393


## High-Performance IP54/40 - Downlight Fixture


The Snow Series is a professional downlight solution that combines durability, aesthetics, and high performance with its aluminum injection-molded body and frame structure. Thanks to its simple design and homogeneous light distribution, it offers comfortable lighting in offices, shops, hotels, educational institutions, and commercial spaces.

The seal detail used between the body and frame provides IP40 and IP54 protection options, while its robust construction and high-quality materials ensure long-lasting performance.

Available in Ø90, Ø150, Ø190 and Ø230mm diameter options to meet various ceiling height and lighting needs.

CE IK02 GLOW WIRE 650°C IP54 IP40 RoHS COMPLIANT

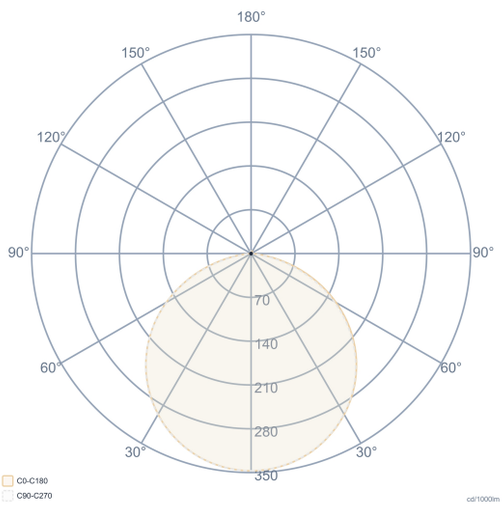

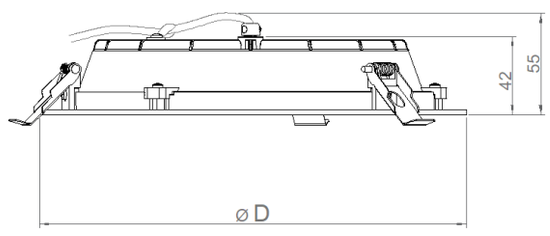
| General Information | |
|---|---|
| **Body & Frame** | Aluminum Injection |
| **Optics** | Opal Diffuser |
| **Paint** | Electrostatic Powder Paint |
| **Insulation Class** | Class II |
| **Product Dimensions [mm]** | Ø94-Ø150-Ø190-Ø230 |
| **Mounting Type** | Recessed |
| **Mounting Part** | Steel Spring |

| Electrical Info | |
|---|---|
| **Power** | 8W-30W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | Constant Current |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >102.000 Hour |

| Lighting Technology | |
|---|---|
| **Light Output Angle** | 110° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional |
|---|
| DALI / 1-10V |
| CRI>90 , 2700K~6500K , Tunable White |
| Emergency Lighting Unit |
| External IP54 Driver Box |

| Order Code | W | Lm | CCT | ØD (mm) | Cut-out dimensions (mm) | Kg |
|---|---|---|---|---|---|---|
| 05393.09.30.007 | 8 | 600 | 3000 | Ø94 | Ø85 | 0,25 |
| 05393.09.40.008 | 8 | 650 | 4000 | Ø94 | Ø85 | 0,25 |
| 05393.15.30.013 | 13 | 1310 | 3000 | Ø150 | Ø140 | 0,40 |
| 05393.15.40.014 | 13 | 1450 | 4000 | Ø150 | Ø140 | 0,40 |
| 05393.15.30.018 | 19 | 1850 | 3000 | Ø150 | Ø140 | 0,40 |
| 05393.15.40.019 | 19 | 2050 | 4000 | Ø150 | Ø140 | 0,40 |
| 05393.19.30.020 | 19 | 1980 | 3000 | Ø190 | Ø180 | 0,60 |
| 05393.19.40.025 | 19 | 2200 | 4000 | Ø190 | Ø180 | 0,60 |
| 05393.19.30.023 | 23 | 2430 | 3000 | Ø190 | Ø180 | 0,60 |
| 05393.19.40.026 | 23 | 2700 | 4000 | Ø190 | Ø180 | 0,60 |
| 05393.23.30.028 | 26 | 2930 | 3000 | Ø230 | Ø215 | 0,80 |
| 05393.23.40.030 | 26 | 3250 | 4000 | Ø230 | Ø215 | 0,80 |
| 05393.23.30.030 | 30 | 3380 | 3000 | Ø230 | Ø215 | 0,80 |
| 05393.23.40.035 | 30 | 3750 | 4000 | Ø230 | Ø215 | 0,80 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com