SNOW IP54/40

05393

High-Performance IP54/40 - Downlight Fixture

The Snow Series is a professional downlight solution that combines durability, aesthetics, and high performance with its aluminum injection-molded body and frame structure. Thanks to its simple design and homogeneous light distribution, it offers comfortable lighting in offices, shops, hotels, educational institutions, and commercial spaces.

The seal detail used between the body and frame provides IP40 and IP54 protection options, while its robust construction and high-quality materials ensure long-lasting performance.

Available in Ø90, Ø150, Ø190 and Ø230mm diameter options to meet various ceiling height and lighting needs.

RAL 9016 RAL 9005 RAL 9006

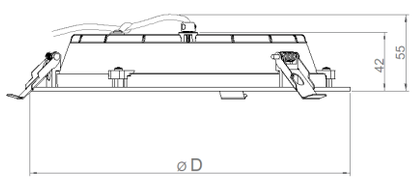

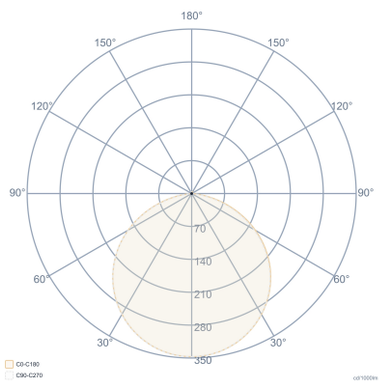

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	**Power**	8W-30W	**Light Output Angle**	110°
Optics	Opal Diffuser	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Paint	Electrostatic Powder Paint	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Insulation Class	Class II	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Product Dimensions [mm]	Ø90(W)xØ230(L)	**Input Voltage**	220-240V AC / 50-60 Hz		
Mounting Type	Recessed	**LED Driver**	Constant Current		
Mounting Part	Steel Spring	**Ambient Temperature**	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØD (mm)	Cut-out dimensions (mm)	Kg
05393.19.30.023	23	2430	3000	Ø190	Ø180	0,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com