


Luna-014

Indoor Lighting - Downlight Lighting

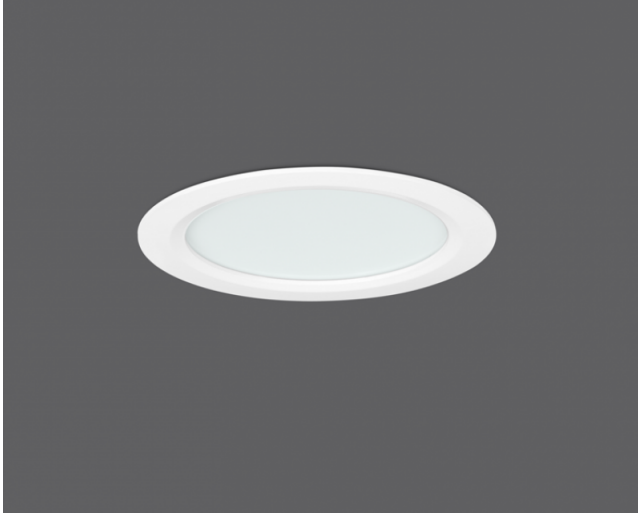

TECHNICAL INFORMATION

Housing	Die-cast aluminium with electrostatic coating
Optics	Opal plexiglass diffuser
LED Lifetime	50.000 hours
L70B50	
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL



Power (W)	13W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit
Plug-in Connector

ASSEMBLY

Installation Type Under Plaster

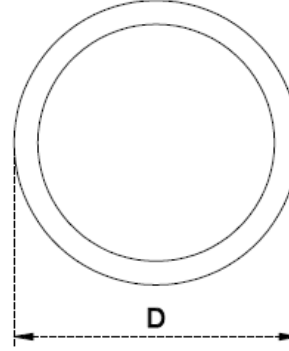

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Ceiling Cutting (mm)
05393.14.30.011	13	1315	3000	Ra>80	139x53	125
05393.14.40.012	13	1370	4000	Ra>80	139x53	125

