



Adella-K1

Indoor Lighting - Spot Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Aluminum Injection
Frame	Aluminum Injection
Reflector	Metallized Surface Optical Reflector + Glass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	30°
UGR Value	UGR < 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	26-35W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Yüksek Verimli Sabit Akım Çıkışlı
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Under Plaster
Mounting Apparatus	Metal Spring

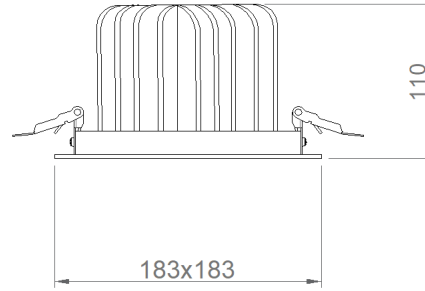

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
52682.11.30.023	26	2300	3000	Ra>80	183x183x110	160x160	0,6
52682.11.40.025	26	2600	4000	Ra>80	183x183x110	160x160	0,6
52682.11.30.030	35	3000	3000	Ra>80	183x183x110	160x160	0,6
52682.11.40.033	35	3500	4000	Ra>80	183x183x110	160x160	0,6

