




ADELLA-K

52682

Adjustable Square Spot Fixture

The Adella-K Series offers high durability and effective heat management thanks to its aluminum injection molded body and frame structure. With K1 and K2 module options, it adapts to different lighting needs, while its adjustable spotlight structure, which can move around its own axis, allows for precise light targeting.

Ideal for shops, offices, hotels, galleries, and commercial spaces, Adella-K combines aesthetics and performance in accent and general lighting applications with its various light angles and color temperature options.

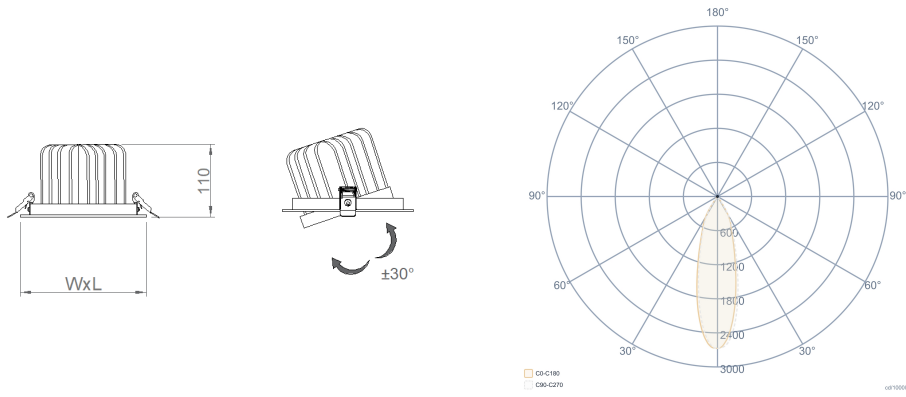

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	26-35W	Light Output Angle	30°
Optics	Polished Reflector + Glass	Power Factor	>0.95	UGR Value	UGR < 22
Paint	Electrostatic Powder Coating	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class II	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	183(W)x183/332(L)x110(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Steel Spring	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
52682.13.40.051	52	5100	30°	4000	332x183x110	160x305	1,20

