



Luna IP65

Indoor Lighting - Downlight Lighting

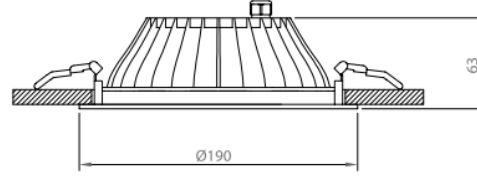

TECHNICAL INFORMATION

Housing	Die-cast aluminium with electrostatic coating
Optics	Highly transmissive opal diffuser
LED Lifetime	50.000 hours
L80B50	
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
CRI	>80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL

Power (W)	13-19W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Under Plaster

Order Code	W	Light Source	CCT	CRI	ØxH (mm)	Kg
05395.19.30.011	13	1300	3000	Ra>80	190x63	175
05395.19.40.012	13	1370	4000	Ra>80	190x63	175
05395.19.30.015	19	1900	3000	Ra>80	190x63	175
05395.19.40.016	19	2000	4000	Ra>80	190x63	175

