

Speedline

Indoor Lighting - Pendant Lighting, Linear Lighting, Surface Mounted Lighting, Industrial Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Metal Sheet
Diffuser	Highly Transmissive Opal Diffuser
Paint	Electrostatic Powder Paint
Dimensions(mm)	43(W) x 67(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	14-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

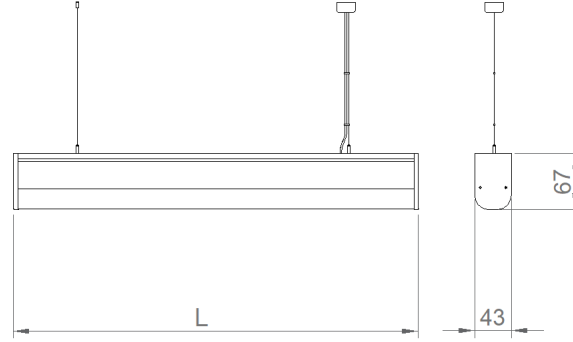

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.46.30.013	14	1670	3000	Ra>80	580	0,6
01180.46.40.014	14	1800	4000	Ra>80	580	0,6
01180.46.30.027	27	3220	3000	Ra>80	1130	1,1
01180.46.40.030	27	3580	4000	Ra>80	1130	1,1
01180.46.30.041	41	4890	3000	Ra>80	1680	1,5
01180.46.40.044	41	5450	4000	Ra>80	1680	1,5

SIVA USTU MODEL

