

Speedline

Indoor Lighting - Pendant Lighting, Linear Lighting, Surface Mounted Lighting



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Metal Sheet
Diffuser	Highly Transmissive Opal Diffuser
Paint	Electrostatic Powder Paint
Dimensions(mm)	43(W) x 67(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	14-41W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

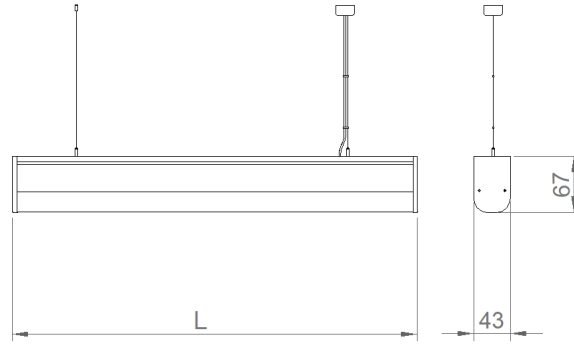

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.46.30.013	14	1670	3000	Ra>80	580	0,6
01180.46.40.014	14	1800	4000	Ra>80	580	0,6
01180.46.30.027	27	3220	3000	Ra>80	1130	1,1
01180.46.40.030	27	3580	4000	Ra>80	1130	1,1
01180.46.30.041	41	4890	3000	Ra>80	1680	1,5
01180.46.40.044	41	5450	4000	Ra>80	1680	1,5

SIVA USTU MODEL

