

BEAM-T


05260


Beam T is a surface-mounted LED wall sconce developed for outdoor applications, with a compact design that complements modern architecture. With a diameter of Ø90mm and height options of 90mm and 160mm, it provides aesthetic compatibility with different facades and architectural details. Its unidirectional light distribution creates homogeneous lighting around facades, entrances, columns, walkways, and building perimeters. COB LED technology ensures high light quality, while its die-cast aluminum housing provides a long-lasting and durable structure. With an IP65 protection rating, it is resistant to rain, humidity, and dust. Available in black, white, and anthracite colors to match various architectural concepts. Its minimal dimensions and simple design make it an ideal outdoor lighting solution for residential, hotel, commercial building, and landscape projects.

Beam T is a surface-mounted LED wall sconce developed for outdoor applications, with a compact design that complements modern architecture. With a diameter of Ø90mm and height options of 90mm and 160mm, it provides aesthetic compatibility with different facades and architectural details. Its unidirectional light distribution creates homogeneous lighting around facades, entrances, columns, walkways, and building perimeters. COB LED technology ensures high light quality, while its die-cast aluminum housing provides a long-lasting and durable structure.

With an IP65 protection rating, it is resistant to rain, humidity, and dust. Available in black, white, and anthracite colors to match various architectural concepts. Its minimal dimensions and simple design make it an ideal outdoor lighting solution for residential, hotel, commercial building, and landscape projects.

RAL 9016 RAL 9005 RAL 7016

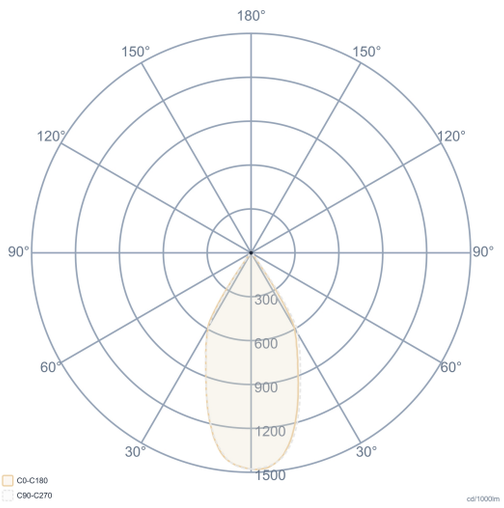

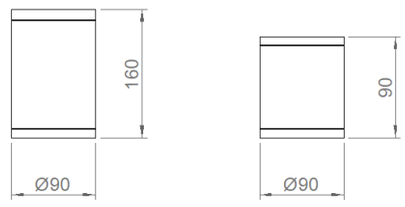

General Information	
Housing	Aluminum and Injection
Optics	Polished Reflector
Glass	Tempered, Clear Glass
Paint	Electrostatic Powder Coated
Insulation Class	Class I
Product Dimensions [mm]	Ø90x138(H)
Mounting Type	Surface

Electrical Info	
Power	8-12W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-25°C/+50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	43°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
05260.90.30.011	12	800	3000	90x138	0,65
05260.90.40.011	12	820	4000	90x138	0,65

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com