

Potent

Indoor Lighting - Industrial Lighting



TECHNICAL INFORMATION

| | |
|------------------------|--|
| Housing | Die-cast aluminum with electrostatic coating |
| Optics | Clear optical lens |
| Glass | Tempered and clear |
| LED Lifetime | 50.000 hours |
| L80B50 | |
| Mounting System | Surface |

OPTICAL SPECIFICATIONS

| | |
|--------------------------------|--------------|
| Light Distribution | Symmetrical |
| Light Output Angle | 120° |
| UGR Value | 80 |
| Color Bin Value | Mc Adams < 3 |
| Color Temperature (CCT) | 3000K/4000K |

ELECTRICAL




| | |
|----------------------|---------------------|
| Power (W) | 60-120W |
| Power Factor | >95 |
| Light Source | SMD Mid Power LED |
| Cabling | Halogen-Free |
| Input Voltage | 220-240V / 50-60 Hz |

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Surface Mounted

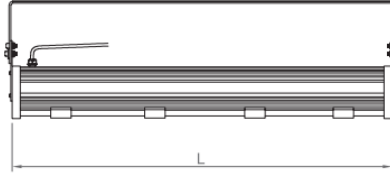

| Order Code | W | Lm | Lm | CRI | WxLxHxH2 (mm) | Kg |
|-----------------|-----|-------|------|-------|----------------|-----|
| 07303.03.30.060 | 60 | 6300 | 3000 | Ra>80 | 155x370x80x188 | 3,3 |
| 07303.03.40.070 | 60 | 7000 | 4000 | Ra>80 | 155x370x80x188 | 3,3 |
| 07303.03.30.099 | 90 | 9900 | 3000 | Ra>80 | 155x370x80x188 | 3,3 |
| 07303.03.40.108 | 90 | 10800 | 4000 | Ra>80 | 155x370x80x188 | 3,3 |
| 07303.06.30.132 | 120 | 13200 | 3000 | Ra>80 | 155x600x80x188 | 4,9 |
| 07303.06.40.144 | 120 | 14400 | 4000 | Ra>80 | 155x600x80x188 | 4,9 |

