

SILVERPIT

05113


Bright Reflector Spot Fixture


The SILVERPIT Series is a compact downlight solution offering controlled and efficient lighting with its COB LED technology, optical lens structure, and highly reflective bright reflector. Thanks to its optical system, it ensures effective light direction, creating high visual comfort and lighting performance.

It is suitable for both general and accent lighting applications in offices, shops, hotels, educational buildings, and commercial spaces. The bright reflector structure increases light efficiency while giving the luminaire a professional and technical look. Available in Ø82mm, Ø105mm, and Ø130mm diameter options to meet different lighting needs. It offers project-specific solutions with various light angles, color temperatures, and control options.

IK02 | GLOW WIRE 650°C | IP20 | RoHS COMPLIANT

RAL 9016 | RAL 9005 | RAL 9006

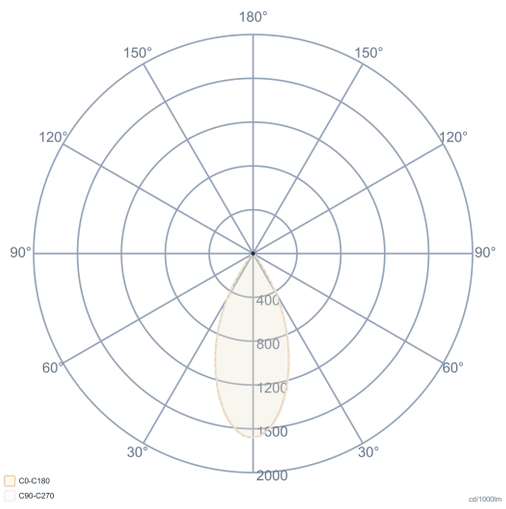

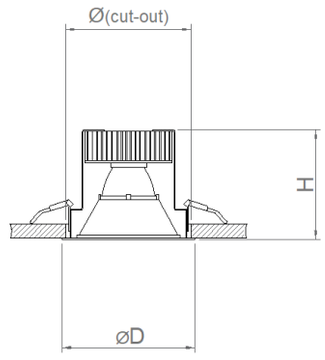

General Information	
Housing	Alüminyum
Frame	Metal
Optics	Polished Reflector
Paint	Electrostatic Powder Coating
Insulation Class	Class II
Product Dimensions [mm]	Ø92/Ø118/Ø141x95/102/120(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	10W-19W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	45°
UGR Value	UGR ≤ 19
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05113.09.30.010	10	1000	45°	3000	Ø92x95	Ø82	0,30
05113.09.40.011	10	1100	45°	4000	Ø92x95	Ø82	0,30
05113.11.30.014	14	1400	45°	3000	Ø118x102	Ø105	0,50
05113.11.40.015	14	1500	45°	4000	Ø118x102	Ø105	0,50
05113.14.30.022	19	2130	45°	3000	Ø141x120	Ø130	0,60
05113.14.40.023	19	2230	45°	4000	Ø141x120	Ø130	0,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com