


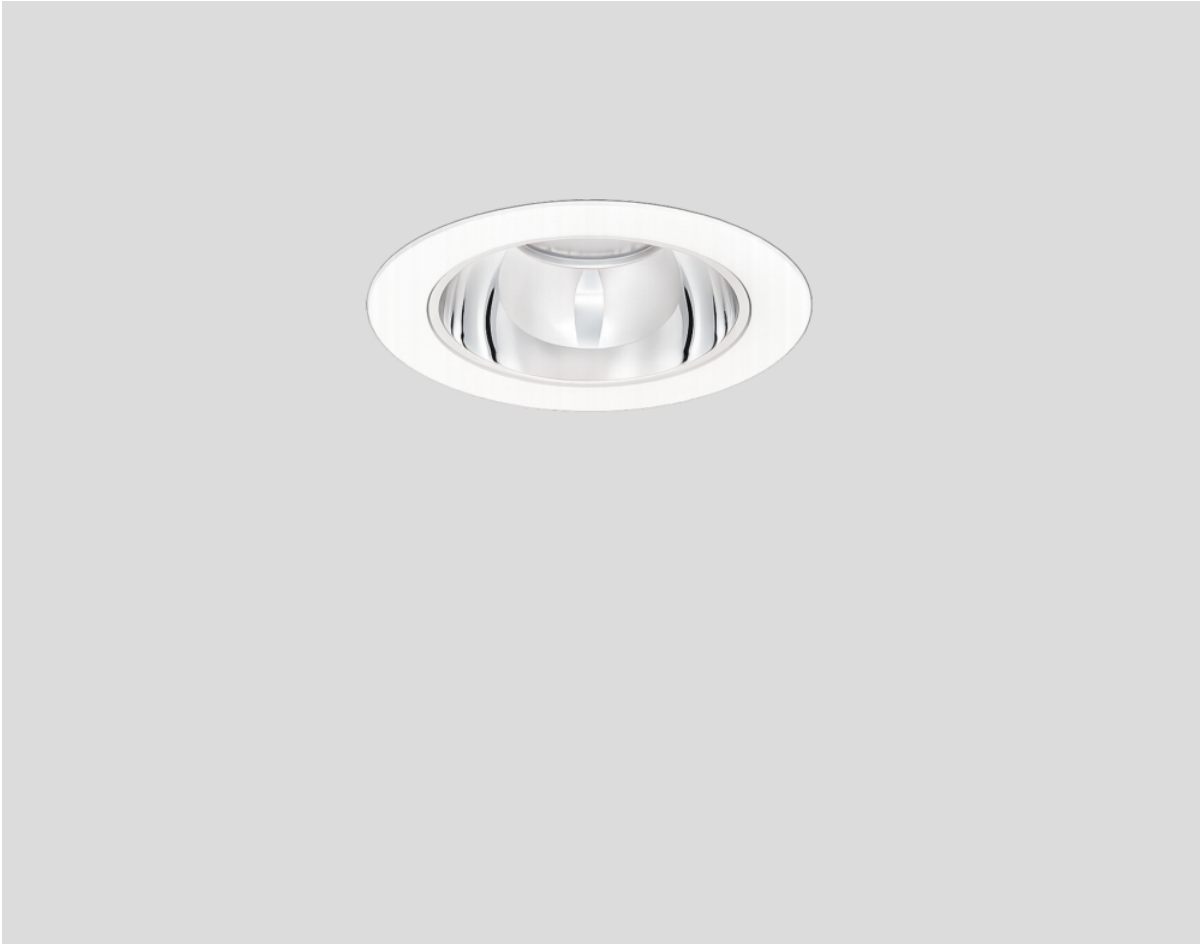


SILVERPIT

05113

Bright Reflector Spot Fixture

The SILVERPIT Series is a compact downlight solution offering controlled and efficient lighting with its COB LED technology, optical lens structure, and highly reflective bright reflector. Thanks to its optical system, it ensures effective light direction, creating high visual comfort and lighting performance.

It is suitable for both general and accent lighting applications in offices, shops, hotels, educational buildings, and commercial spaces. The bright reflector structure increases light efficiency while giving the luminaire a professional and technical look. Available in Ø82mm, Ø105mm, and Ø130mm diameter options to meet different lighting needs. It offers project-specific solutions with various light angles, color temperatures, and control options.

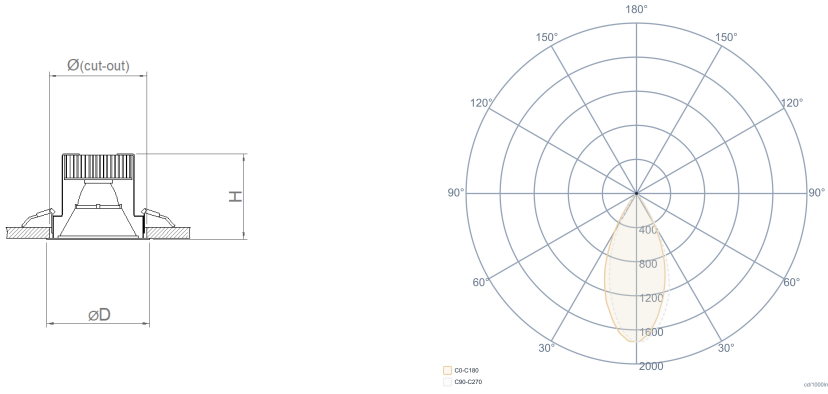

General Information		Electrical Info		Lighting Technology	
Housing	Alüminyum	Power	10W-19W	Light Output Angle	45°
Frame	Metal	Power Factor	>0.95	UGR Value	UGR ≤ 19
Optics	Polished Reflector	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	Ø92/Ø118/Ø141x95/102/120(H)	LED Driver	Constant Current		
Mounting Type	Recessed	Ambient Temperature	-20°C / +50°C		
Mounting Part	Steel Spring	LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05113.14.30.022	19	2130	45°	3000	Ø141x120	Ø130	0,60