

Silverpit-140

Indoor Lighting - Spot Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile + Metal Sheet
Frame	Metal Sheet
Reflector	Anti-Glare Silver Reflector
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	45°
UGR Value	UGR ≤ 16
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	19W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-I Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Under Plaster
Mounting Apparatus	Steel Spring

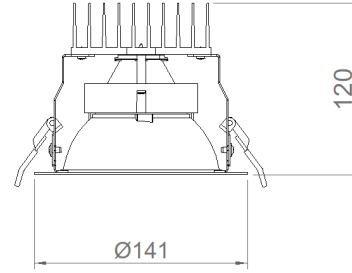

Order Code	W	Lm	Angle	CCT	CRI	ØxH (mm)	Cut-out dimensions (mm)	Kg
05113.14.30.022	19	2130	45°	3000	Ra>80	141x120	Ø130	0,6
05113.14.40.023	19	2230	45°	4000	Ra>80	141x120	Ø130	0,6

