

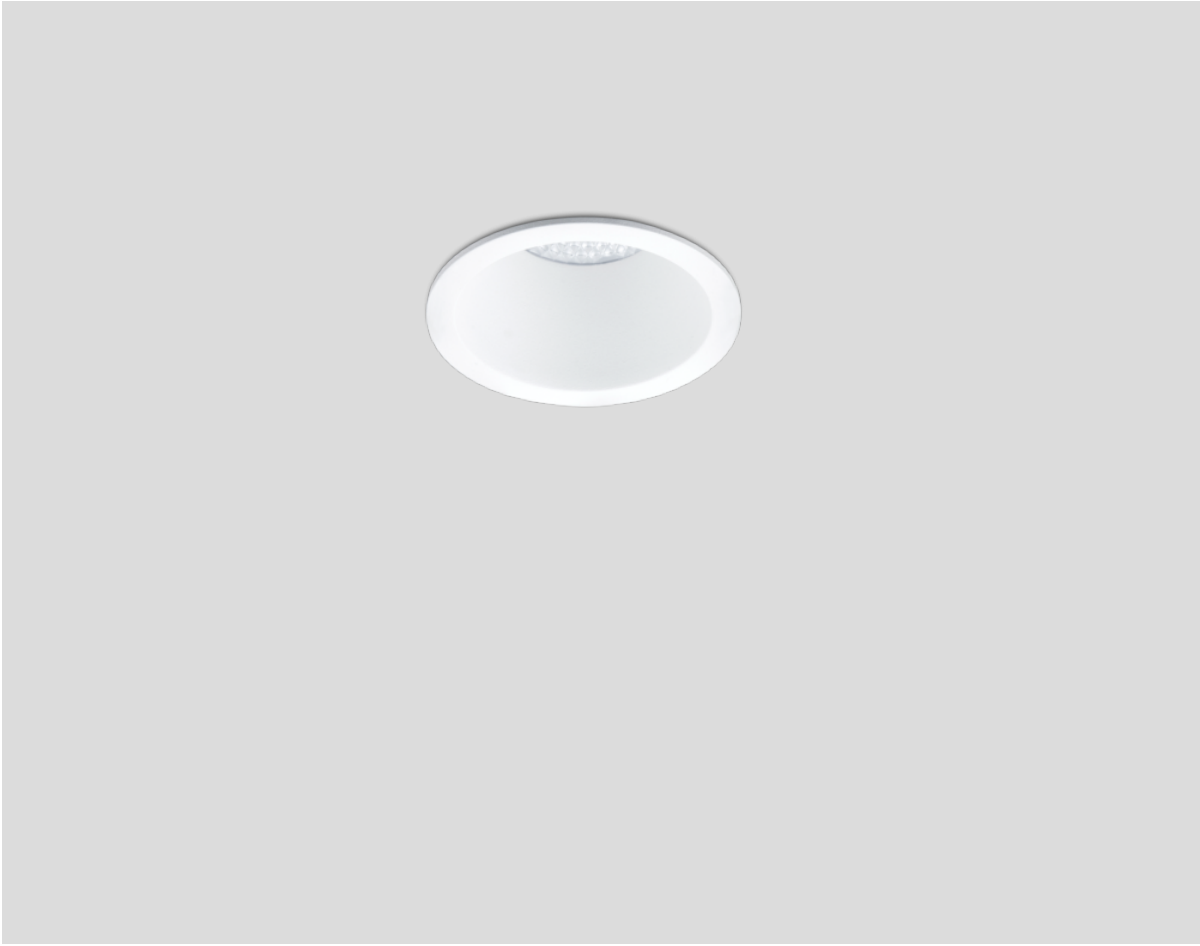


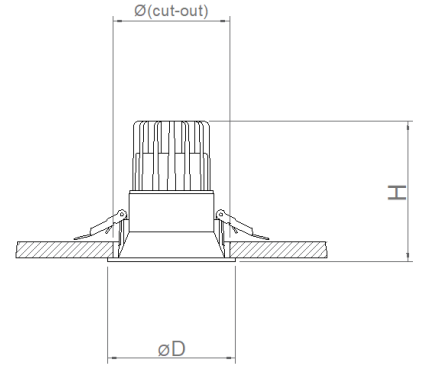

RAL 9016 RAL 9005 RAL 9006

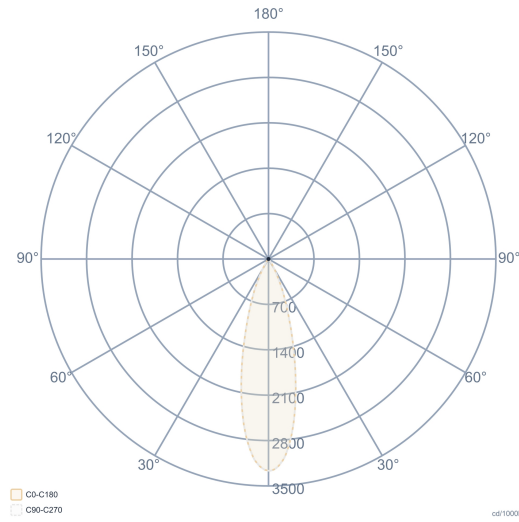

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	6W-20W	Light Output Angle	32°
Optics	Transparent Acrylic + Lens + Reflector	Power Factor	>0.95	UGR Value	UGR ≤ 16
Paint	Electrostatic Powder Paint	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class II	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø60/Ø82/Ø100x66/84/110(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Steel Spring	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05112.08.40.007	7	700	32°	4000	Ø82x84	Ø75	0,20

MINO 05112

Glass Protected Spot Lighting Fixture

The MINO Series is a professional spotlight solution offering high visual comfort thanks to its internally located optical structure, metallized reflector, and transparent acrylic protected system. With a glare value of $UGR \leq 16$, it reduces direct visibility of the light source, providing comfortable and controlled lighting.

The aluminum injection-molded body and frame structure give the product high durability and a long lifespan, while its simple design blends seamlessly with modern architectural projects. Its optical structure provides effective results in accent and general lighting applications.

Developed for use in offices, shops, hotels, educational buildings, and commercial spaces, the MINO Series offers an ideal solution for architectural projects with its aesthetic appearance, low glare, and high performance.

