

Calm

Indoor Lighting - Appliques



TECHNICAL INFORMATION

Housing Electrostatic Powder Coated Aluminum

OPTICAL SPECIFICATIONS

Light Distribution Asymmetrical
Light Output Angle 120°
UGR Value UGR ≤ 19
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 11W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

CRI > 90
 2700K ~ 6500K

ASSEMBLY

Installation Type Surface Mounted

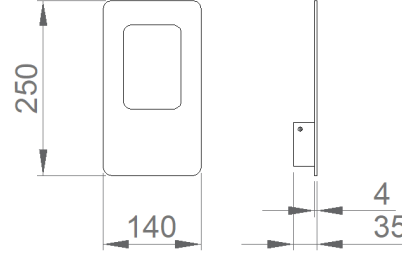

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
06191.12.40.009	7	50	4000	Ra>80	138x250x35	0,5

