
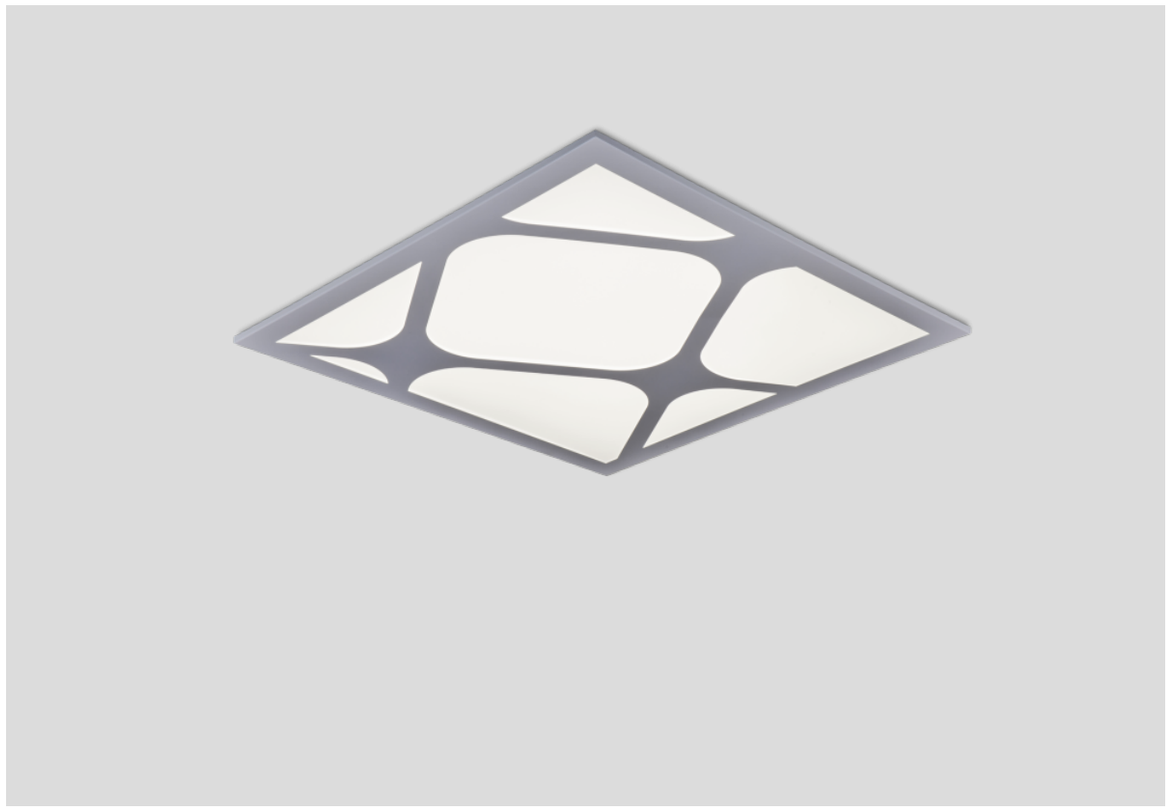



SPIDER

02118

Custom Designed 60x60 Decorative Panel

RAL 9016 RAL 9005 RAL 9006

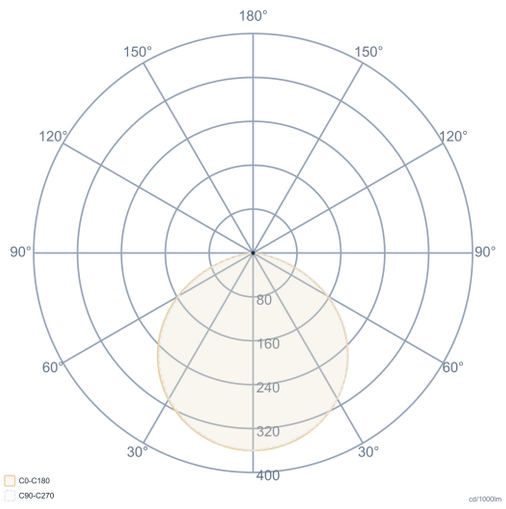

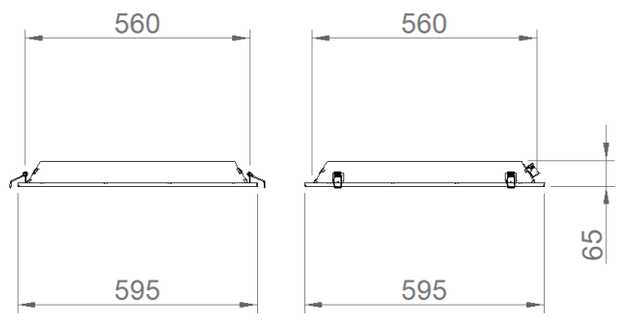

General Information		Electrical Info		Lighting Technology	
Body & Frame	DKP Metal Sheet	**Power**	28W	**Light Output Angle**	110°
Optics	Opal Diffuser	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Paint	Electrostatic Powder Paint	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Insulation Class	Class I	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 65(H)	**Input Voltage**	220-240V AC / 50-60 Hz		
Mounting Type	Recessed	**LED Driver**	Constant Current		
Mounting Part	Steel Spring	**Ambient Temperature**	-20°C / +50°C		
		LED Lifetime L70	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Lm	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02118.66.30.028	28	2310	3000	Ra>80	595x595x65	575x575	4.10
02118.66.40.034	28	2430	4000	Ra>80	595x595x65	575x575	4.10

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com