

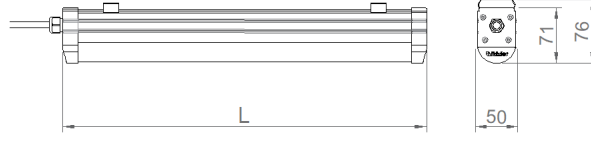


Minsu

Indoor Lighting - Industrial Lighting



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	PC Injection
Diffuser	Opal Diffuser
Paint	Anodized Coating
Dimensions(mm)	50(W) x 71(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	130°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	11-50W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Metal Bracket

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07104.03.40.013	11	1390	4000	Ra>80	50x315x71	0.4
07104.04.40.016	13	1590	4000	Ra>80	50x455x71	0.5
07104.04.40.020	16	2020	4000	Ra>80	50x455x71	0.5
07104.07.40.019	15	1930	4000	Ra>80	50x735x71	0.7
07104.07.40.024	18	2300	4000	Ra>80	50x735x71	0.7
07104.07.40.030	24	3100	4000	Ra>80	50x735x71	0.7
07104.07.40.033	26	3180	4000	Ra>80	50x735x71	0.7
07104.08.40.037	29	3740	4000	Ra>80	50x875x71	0.7
07104.10.40.028	20	2780	4000	Ra>80	50x1015x71	1.0
07104.10.40.033	25	3380	4000	Ra>80	50x1015x71	1.0
07104.10.40.038	29	3830	4000	Ra>80	50x1015x71	1.0
07104.10.40.043	33	4260	4000	Ra>80	50x1015x71	1.0
07104.11.40.033	23	3200	4000	Ra>80	50x1155x71	1.6
07104.11.40.038	29	3800	4000	Ra>80	50x1155x71	1.6
07104.11.40.044	34	4320	4000	Ra>80	50x1155x71	1.6
07104.11.40.050	40	4960	4000	Ra>80	50x1155x71	1.6
07104.14.40.041	30	4020	4000	Ra>80	50x1435x71	1.9
07104.14.40.066	37	4850	4000	Ra>80	50x1435x71	1.9
07104.14.40.048	43	5460	4000	Ra>80	50x1435x71	1.9
07104.14.40.062	50	6200	4000	Ra>80	50x1435x71	1.9

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogta ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

