




# Duet Short

Indoor Lighting - Recessed Lighting

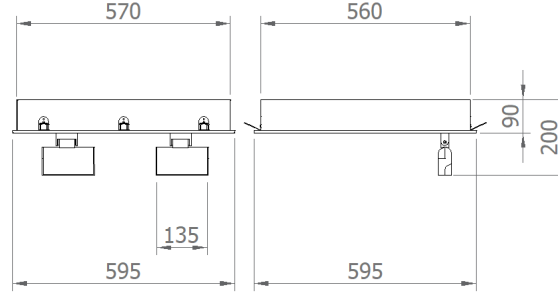

## Colour Options



Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg	Cut-out dimensi (mm)
02128.66.30.029	50	3970	3000	Ra>80	595x595x90	5.5	575x575
02128.66.40.030	50	4780	4000	Ra>80	595x595x90	5.5	575x575

## TECHNICAL INFORMATION

<b>Body &amp; Frame</b>	Metal Sheet
<b>Profile Body</b>	Aluminum Extrusion Profile
<b>Diffuser</b>	High Transmittance Opal Diffuser
<b>Reflector</b>	Multiple Matte Black
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Optics</b>	Symmetrical
<b>Optics</b>	48°
<b>Light Output Angle</b>	48°(Spot) - 54°(General)
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL

<b>Power (W)</b>	50W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

## ASSEMBLY

<b>Installation Type</b>	Under Plaster
<b>Mounting Apparatus</b>	Metal Spring

