



Lightline MC-058

Indoor Lighting - Linear Lighting, Surface Mounted Lighting

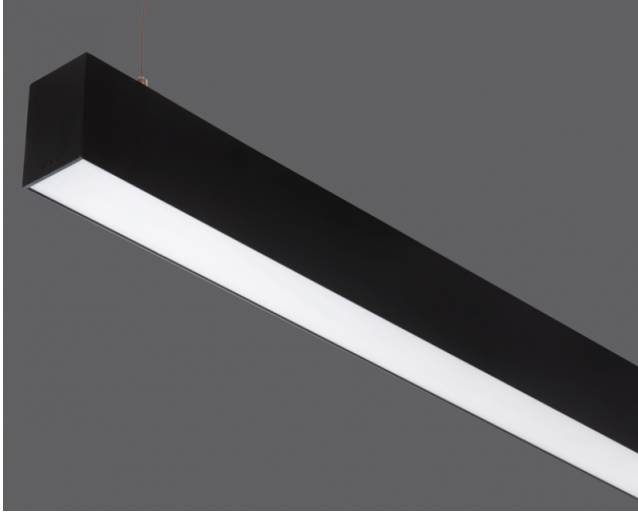

Colour Options



TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Microprismatic Lens
Paint	Electrostatic Powder Paint
Dimensions(mm)	58(W) x 82(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	15-62W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

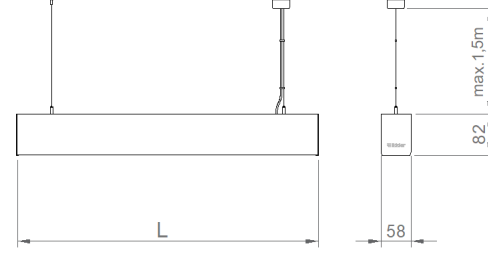

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.57.30.015	15	1300	3000	Ra>80	575	1,3
01180.57.40.016	15	1360	4000	Ra>80	575	1,3
01180.57.30.021	21	1730	3000	Ra>80	575	1,3
01180.57.40.022	21	1770	4000	Ra>80	575	1,3
01180.57.30.023	22	1850	3000	Ra>80	855	2,0
01180.57.40.024	22	1940	4000	Ra>80	855	2,0
01180.57.30.032	31	3030	3000	Ra>80	855	2,0
01180.57.40.033	31	3410	4000	Ra>80	855	2,0
01180.57.30.031	29	2160	3000	Ra>80	1135	2,7
01180.57.40.032	29	2270	4000	Ra>80	1135	2,7
01180.57.30.043	42	3890	3000	Ra>80	1135	2,7
01180.57.40.044	42	4090	4000	Ra>80	1135	2,7
01180.57.30.038	36	3710	3000	Ra>80	1415	3,2
01180.57.40.039	36	3960	4000	Ra>80	1415	3,2
01180.57.30.053	52	5050	3000	Ra>80	1415	3,2
01180.57.40.055	52	5720	4000	Ra>80	1415	3,2
01180.57.30.046	43	4460	3000	Ra>80	1695	3,7
01180.57.40.048	43	4840	4000	Ra>80	1695	3,7
01180.57.30.064	62	6050	3000	Ra>80	1695	3,7
01180.57.40.066	62	6850	4000	Ra>80	1695	3,7

