


Lightline MC-058

Indoor Lighting - Pendant Lighting, Linear Lighting, Surface Mounted Lighting



Colour Options

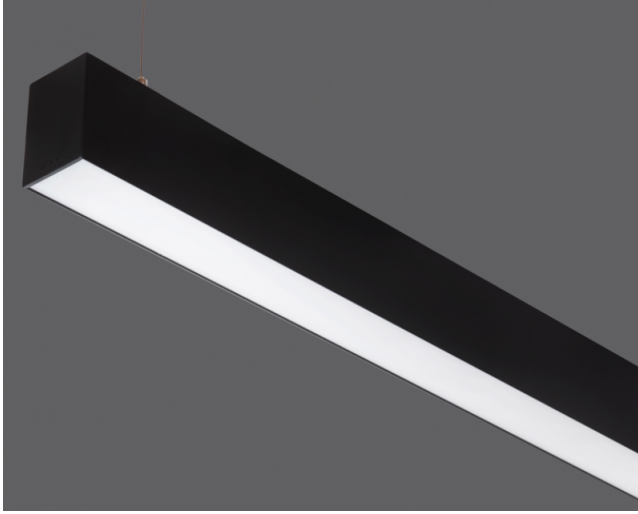

Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Microprismatic Lens
Paint	Electrostatic Powder Paint
Dimensions(mm)	58(W) x 82(H)

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	15-62W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Energy Input Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

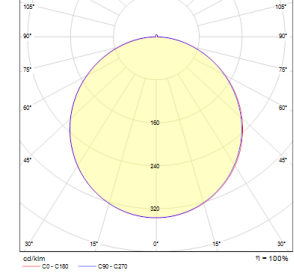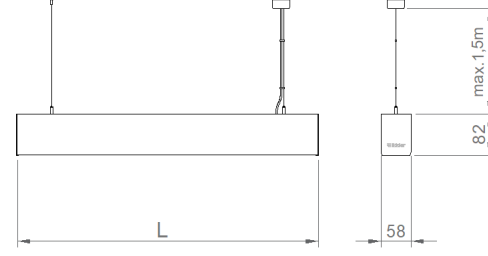

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.57.30.015	15	1300	3000	Ra>80	575	1,3
01180.57.40.016	15	1360	4000	Ra>80	575	1,3
01180.57.30.021	21	1730	3000	Ra>80	575	1,3
01180.57.40.022	21	1770	4000	Ra>80	575	1,3
01180.57.30.023	22	1850	3000	Ra>80	855	2,0
01180.57.40.024	22	1940	4000	Ra>80	855	2,0
01180.57.30.032	31	3030	3000	Ra>80	855	2,0
01180.57.40.033	31	3410	4000	Ra>80	855	2,0
01180.57.30.031	29	2160	3000	Ra>80	1135	2,7
01180.57.40.032	29	2270	4000	Ra>80	1135	2,7
01180.57.30.043	42	3890	3000	Ra>80	1135	2,7
01180.57.40.044	42	4090	4000	Ra>80	1135	2,7
01180.57.30.038	36	3710	3000	Ra>80	1415	3,2
01180.57.40.039	36	3960	4000	Ra>80	1415	3,2
01180.57.30.053	52	5050	3000	Ra>80	1415	3,2
01180.57.40.055	52	5720	4000	Ra>80	1415	3,2
01180.57.30.046	43	4460	3000	Ra>80	1695	3,7
01180.57.40.048	43	4840	4000	Ra>80	1695	3,7
01180.57.30.064	62	6050	3000	Ra>80	1695	3,7
01180.57.40.066	62	6850	4000	Ra>80	1695	3,7

