# Running-Lighting Unit

Trunking Lighting Systems - Lighting Units

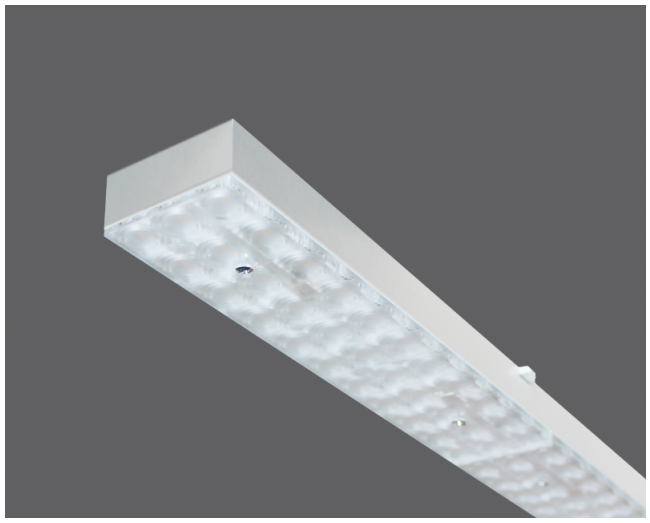

**Colour Options**

Ral 9006 | Ral 9005

## TECHNICAL INFORMATION

| | |
|---|---|
| **Housing** | Electrostatic Powder Coated Aluminum Profile |
| **Side Cover** | PC Injection |
| **Diffuser** | High Light Transmittance Optical Lens |
| **Dimensions(mm)** | 65x38mm |

## OPTICAL SPECIFICATIONS

| | |
|---|---|
| **Light Distribution** | Symmetrical / Asymmetrical |
| **Light Output Angle** | 30°Sym / 60°Sym / 90°Sym / 2x25°Asym |
| **UGR Value** | UGR ≤ 22 |
| **CRI** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

## ELECTRICAL

| | |
|---|---|
| **Power (W)** | 52-78W |
| **Power Factor** | >0.95 |
| **Cabling** | Halojen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | High Efficiency Constant Current Output |
| **Ambient Temperature** | -20 °C/+40 °C |
| **LED Lifetime L90B10** | >100.000 Hours |

## OPTIONAL

DALI *
1-10V DIM *
DC Operation Mode
Emergency Kit (1h/3h)
2700K ~ 6500K

## ASSEMBLY

| | |
|---|---|
| **Installation Type** | Surface Mounted, Pendant |
| **Mounting Apparatus** | Steel Spring |

GLOW WIRE 650°C | IP 40 | IK 08 | RoHS COMPLIANT

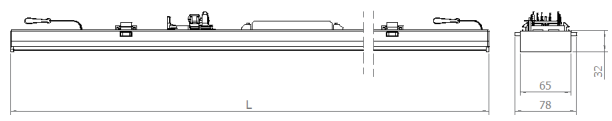


| Order Code | W | Lm | CCT | Angle | L (mm) | Kg |
|---|---|---|---|---|---|---|

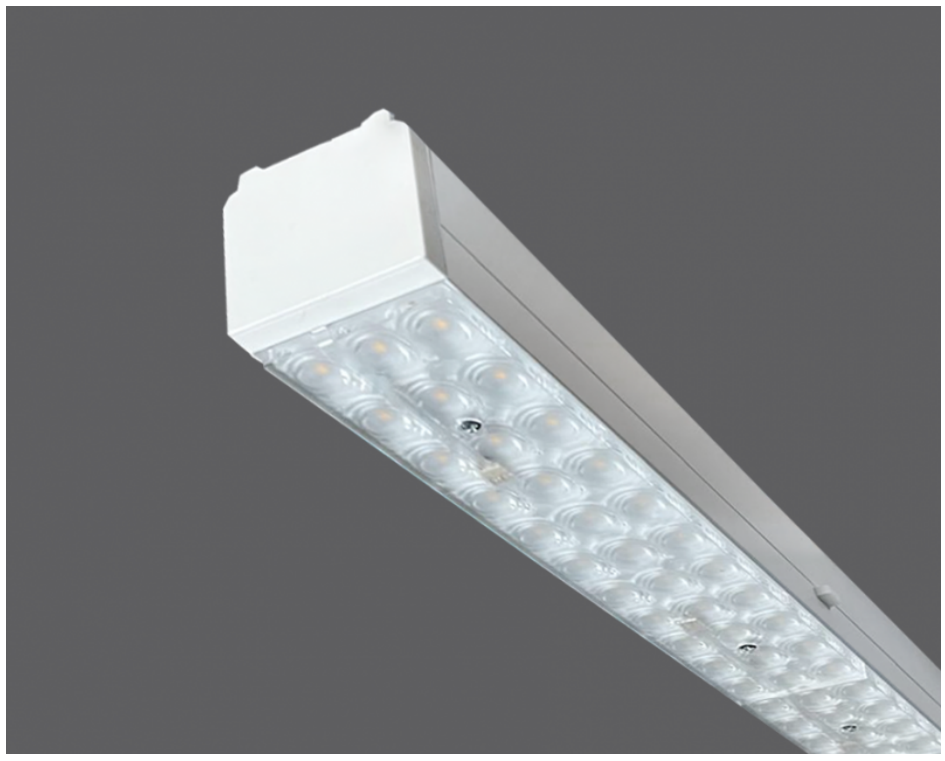

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com