

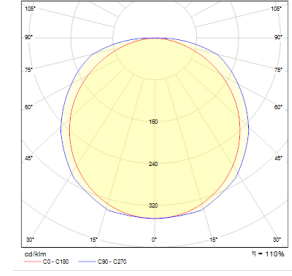


Duet Long

Indoor Lighting - Recessed Lighting

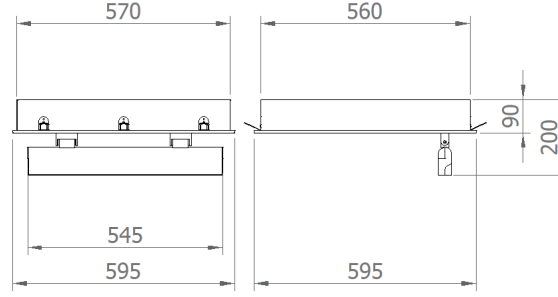

Colour Options



Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
02128.66.30.044	54	4400	3000	Ra>80	595x595x90	5,5
02128.66.40.046	54	4640	4000	Ra>80	595x595x90	5,5

TECHNICAL INFORMATION

Body & Frame	Metal Sheet
Profile Body	Aluminum Extrusion Profile
Diffuser	Endirek Diffuser, Highly transmissive opal diffuser
Reflector	Multiple Matte Black
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	48°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	54W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabbling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

ASSEMBLY

Installation Type Under Plaster

