

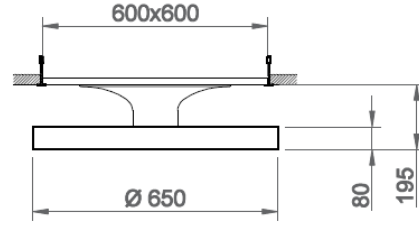


Noon Maxi

Indoor Lighting - Recessed Lighting



Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
02137.60.30.045	46	4150	3000	Ra>80	600x600x195	7,1
02137.60.40.046	46	4370	4000	Ra>80	600x600x195	7,1

TECHNICAL INFORMATION

Housing	Aluminum profile with electrostatic coating
Optics	Highly transmissive opal diffuser
LED Lifetime	50.000 hours
L80B50	
Mounting System	Recessed

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL

Power (W)	46W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit
Tunable White

ASSEMBLY

Installation Type Under Plaster

