

CORVUS-T


03170


Circular Surface Mounted Luminarie

The Corvus T series, with its solid circular form and surface-mounted design, offers an aesthetic lighting solution for modern projects. Its slim aluminum profile body provides a minimalist aesthetic. It blends seamlessly into contemporary interiors in offices, social areas, hotels, and commercial projects. The surface-mounted design is a stylish and functional alternative, especially in applications where there is no suspended ceiling space.

Thanks to our manufacturing infrastructure, the Corvus T series can be produced in various diameters, going beyond standard sizes to meet project-specific design needs. With different diameter, color temperature, and control options, it offers flexible lighting solutions for architectural concepts, while its simple form and high-quality light effect create a strong architectural accent in spaces.

RAL 9016 RAL 9005 RAL 9006

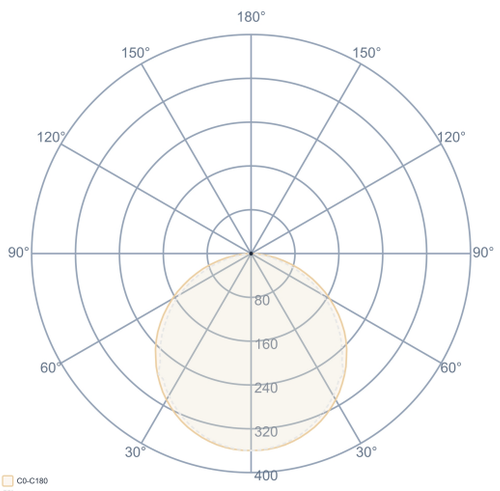

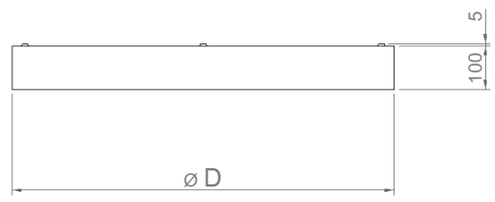

General Information	
Housing	Aluminum Extruded
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø380/500/600/900/1200x100(H)
Mounting Type	Surface and Pendant
Mounting Part	Screw Dowel Set

Electrical Info	
Power	20W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØD (mm)	Kg
03170.38.30.021	20	1800	3000	Ø380	2,80
03170.38.40.022	20	1900	4000	Ø380	2,80
03170.50.30.036	38	3430	3000	Ø500	3,50
03170.50.40.039	38	3610	4000	Ø500	3,50
03170.60.30.044	47	4240	3000	Ø600	3,70
03170.60.40.047	47	4460	4000	Ø600	3,70
03170.90.30.107	69	6220	3000	Ø900	5,50
03170.90.40.111	69	6550	4000	Ø900	5,50
03170.12.30.092	96	8665	3000	Ø1200	7,40
03170.12.40.097	96	9120	4000	Ø1200	7,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com