

FLAT-T 600


03135

60x60 Surface Mounted Panel Lighting Fixture

Flat-T 600 is a professional panel lighting solution developed for offices, educational institutions, healthcare facilities, and commercial spaces, featuring a metal sheet housing and surface-mounted design. Its homogeneous light distribution provides comfortable and balanced illumination. The surface-mounted design offers a practical solution for applications where there is no suspended ceiling space. Its slim body and minimalist design allow it to easily adapt to various architectural concepts.

It is particularly preferred in offices, educational buildings, healthcare facilities, commercial spaces, and corporate projects. With different power, color temperature, and control options, it adapts to project-specific lighting scenarios.

RAL 9016 RAL 9005 RAL 9006

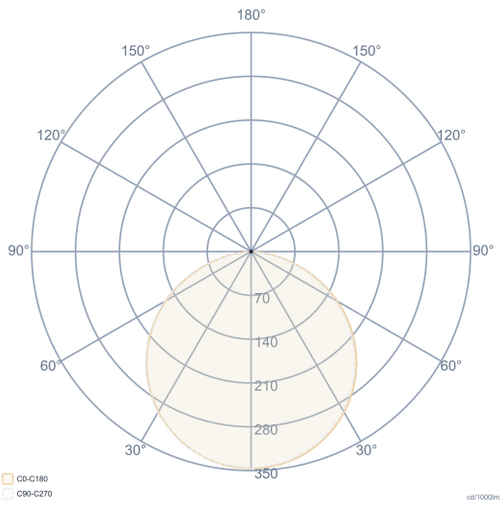



General Information	
Body & Frame	DKP Metal Sheet
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	630(W) x 630(L) x 75(H)
Mounting Type	Surface
Mounting Part	Screw Dowel Set

Electrical Info	
Power	28-35W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
03135.66.30.029	28	3080	3000	630x630x70	4.00
03135.66.40.030	28	3200	4000	630x630x70	4.00
03135.66.30.036	33	3750	3000	630x630x70	4.00
03135.66.40.037	33	3960	4000	630x630x70	4.00
03135.66.30.040	39	4300	3000	630x630x70	4.00
03135.66.40.041	39	4450	4000	630x630x70	4.00

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com