

Flat-T 600

Indoor Lighting - Surface Mounted Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Metal Sheet
Diffuser	High Transmittance Opal Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	28-35W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Screw Dowel Set

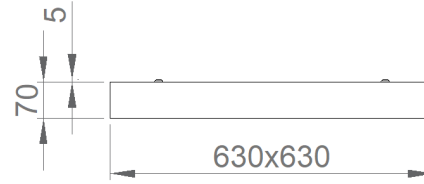

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
03135.66.30.033	28	2800	3000	Ra>80	630x630x70	4.0
03135.66.40.034	28	3210	4000	Ra>80	630x630x70	4.0
03135.66.30.029	31	2900	3000	Ra>80	630x630x70	4.0
03135.66.40.030	31	3160	4000	Ra>80	630x630x70	4.0
03135.66.30.036	33	3600	3000	Ra>80	630x630x70	4.0
03135.66.40.037	33	3960	4000	Ra>80	630x630x70	4.0
03135.66.30.040	35	4000	3000	Ra>80	630x630x70	4.0
03135.66.40.041	35	4100	4000	Ra>80	630x630x70	4.0

