

# Even-G 1200

Indoor Lighting - Sterile Environment Lighting



## TECHNICAL INFORMATION

**Housing** Metal Sheet  
**Diffuser** Opal Diffuser  
**Paint** Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

**Optics** Symmetrical  
**Light Output Angle** 120°  
**UGR Value** UGR ≤ 22  
**CRI** CRI ≥ 80  
**Color Bin Value** Mc Adams ≤ 3

## ELECTRICAL



**Power (W)** 33-52W  
**Power Factor** >0.95  
**Light Source** SMD Mid Power LED  
**Cabling** Halogen-Free  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output  
**Ambient Temperature** 0°C / +40°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

## ASSEMBLY

**Installation Type** Under Plaster  
**Mounting Apparatus** Metal Bracket

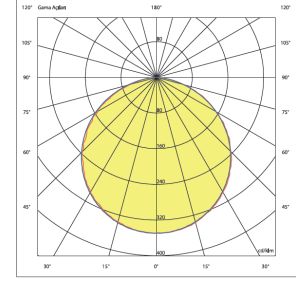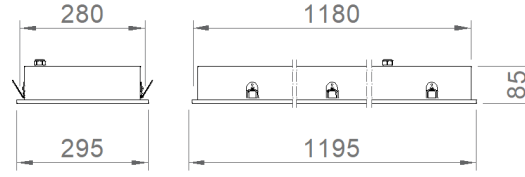

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02142.31.30.032	33	2555	3000	Ra>80	295x1195x85	280x1180	3,5
02142.31.40.033	33	2690	4000	Ra>80	295x1195x85	280x1180	3,5
02142.31.30.040	52	4000	3000	Ra>80	295x1195x85	280x1180	3,5
02142.31.40.041	52	4100	4000	Ra>80	295x1195x85	280x1180	3,5

