

Even-G 1200

Indoor Lighting - Sterile Environment Lighting



TECHNICAL INFORMATION

Housing Metal Sheet
Diffuser Opal Diffuser
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 33-52W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature 0°C / +40°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

ASSEMBLY

Installation Type Under Plaster
Mounting Apparatus Metal Bracket

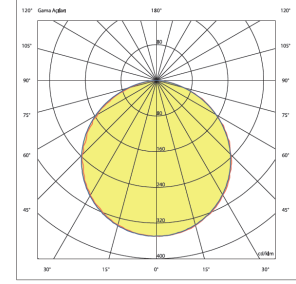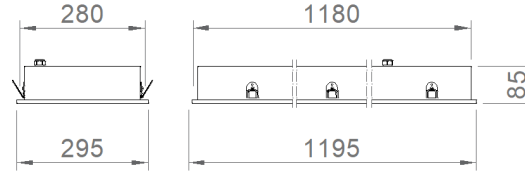

| Order Code | W | Lm | CCT | CRI | WxLxH (mm) | Ceiling Cutting (mm) | Kg |
|-----------------|----|------|------|-------|-------------|----------------------|-----|
| 02142.31.30.032 | 33 | 2555 | 3000 | Ra>80 | 295x1195x85 | 280x1180 | 3,5 |
| 02142.31.40.033 | 33 | 2690 | 4000 | Ra>80 | 295x1195x85 | 280x1180 | 3,5 |
| 02142.31.30.040 | 52 | 4000 | 3000 | Ra>80 | 295x1195x85 | 280x1180 | 3,5 |
| 02142.31.40.041 | 52 | 4100 | 4000 | Ra>80 | 295x1195x85 | 280x1180 | 3,5 |

