

Even-G 1200

Indoor Lighting - Sterile Environment Lighting



TECHNICAL INFORMATION

Housing Metal Sheet
Diffuser Opal Diffuser
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 33-52W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature 0°C / +40°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

ASSEMBLY

Installation Type Under Plaster
Mounting Apparatus Metal Bracket

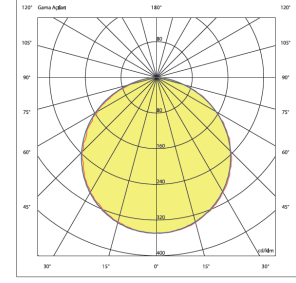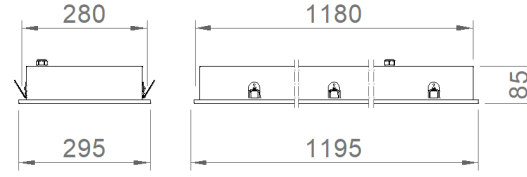

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02142.31.30.032	33	2555	3000	Ra>80	295x1195x85	280x1180	3,5
02142.31.40.033	33	2690	4000	Ra>80	295x1195x85	280x1180	3,5
02142.31.30.040	52	4000	3000	Ra>80	295x1195x85	280x1180	3,5
02142.31.40.041	52	4100	4000	Ra>80	295x1195x85	280x1180	3,5

