

Escape - Sivaaltı

Indoor Lighting - Emergency Lighting and Directional Luminaire



*Piktogram seçenekleri için teknik çizime tıklayınız.

Colour Options



Ral 9016

TECHNICAL INFORMATION

Housing	Polycarbonate and Hanger Tie
Frame	Foil Printed Acrylic Lens
Diffuser	Transparent Plexiglass
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

ELECTRICAL


Power (W)	1.2W
Power Factor	>0.90
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output Rail
Ambient Temperature	0°C / +40°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Under Plaster
Mounting Apparatus	Metal Bracket

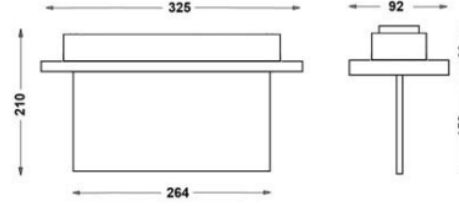

Order Code	W	Lm	How to use	Battery	WxHxL (mm)	Ceiling Cutting (mm)	Kg
80521.000.001-IK01	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.002-IK02	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.003-IK03	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.004-IK04	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.005-IK05	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.006-IK06	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.007-IK07	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.008-IK08	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.009-IK09	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.010-IK10	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.011-IK11	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.012-IK12	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.013-IK13	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.014-IK14	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.015-IK15	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.016-IK16	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.017-IK17	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.018-IK18	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.019-IK19	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.020-IK20	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.021-IK21	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.022-IK22	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.023-IK23	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80521.000.024-IK24	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33
80522.000.001-IK01-K02	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.003-IK03-IK04	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.005-IK05-IK06	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.007-IK07-IK08	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.009-IK09-IK10	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.011-IK11-IK12	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.013-IK13-IK14	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.015-IK15-IK16	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.017-IK17-IK18	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33

80522.000.019-IK19-I K20	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.021-IK021-I IK21	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.022-IK22-I K23	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33
80522.000.024-IK24-I K25	1.2	20	Çift Yüzlü	3H	92x210x264	295x50	0,33

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K. Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir. İkiizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikiizleraydinlatma.com

+90 (216) 397 22 16
info@ikiizleraydinlatma.com

