

# Escape - Sivaaltı

Indoor Lighting - Emergency Lighting and Directional Luminaire



## Colour Options



Ral 9016

## TECHNICAL INFORMATION

<b>Housing</b>	Polycarbonate and Hanger Tie
<b>Frame</b>	Foil Printed Acrylic Lens
<b>Diffuser</b>	Transparent Plexiglass
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

## ELECTRICAL


<b>Power (W)</b>	1.2W
<b>Power Factor</b>	>0.90
<b>Light Source</b>	SMD Mid Power LED
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output Rail
<b>Ambient Temperature</b>	0°C / +40°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

## ASSEMBLY

<b>Installation Type</b>	Under Plaster
<b>Mounting Apparatus</b>	Metal Bracket

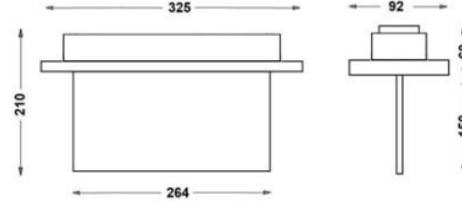

Order Code	W	Lm	How to use	Battery	WxHxL (mm)	Ceiling Cutting (mm)	Kg
80521.000.009-IK09	1.2	20	Tek Yüzlü	3H	92x210x264	295x50	0,33

