

Escape - Sivaaltı

Indoor Lighting - Emergency Lighting and Directional Luminaire



*Piktogram seçenekleri için teknik çizime tıklayınız.

Colour Options



Ral 9016

TECHNICAL INFORMATION

| | |
|-----------------|------------------------------|
| Housing | Polycarbonate and Hanger Tie |
| Frame | Foil Printed Acrylic Lens |
| Diffuser | Transparent Plexiglass |
| Paint | Electrostatic Powder Paint |

OPTICAL SPECIFICATIONS

ELECTRICAL


| | |
|----------------------------|--|
| Power (W) | 1.2W |
| Power Factor | >0.90 |
| Light Source | SMD Mid Power LED |
| Input Voltage | 220-240V AC / 50-60 Hz |
| LED Driver | High Efficiency Constant Current Output Rail |
| Ambient Temperature | 0°C / +40°C |
| LED Lifetime L80B50 | >50.000 Hour |

OPTIONAL

| | |
|-------------------------------|---------------------------|
| - DALI | - 1-10V DIM |
| - Tunable White | - Emergency Lighting Unit |
| - CRI > 90 | - 2700K ~ 6500K |
| - Different RAL Color Options | - Plug-in Connector |
| - Class-II Protection Class | - PIR Sensor |
| - AC-DC Supply(MBS) | |

ASSEMBLY

| | |
|---------------------------|---------------|
| Installation Type | Under Plaster |
| Mounting Apparatus | Metal Bracket |

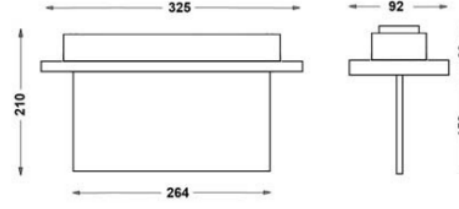

| Order Code | W | Lm | How to use | Battery | WxHxL (mm) | Ceiling Cutting (mm) | Kg |
|--------------------|-----|----|------------|---------|------------|----------------------|------|
| 80521.000.018-IK18 | 1.2 | 20 | Tek Yüzlü | 3H | 92x210x264 | 295x50 | 0,33 |

