


Escape - Sivaaltı

Indoor Lighting - Emergency Lighting and Directional Luminaire



Colour Options 
Ral 9016

TECHNICAL INFORMATION

Housing Polycarbonate and Hanger Tie
Frame Foil Printed Acrylic Lens
Diffuser Transparent Plexiglass
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

ELECTRICAL


Power (W) 1.2W
Power Factor >0.90
Light Source SMD Mid Power LED
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output Rail
Ambient Temperature 0°C / +40°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- AC-DC Supply(MBS)
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- PIR Sensor

ASSEMBLY

Installation Type Under Plaster
Mounting Apparatus Metal Bracket

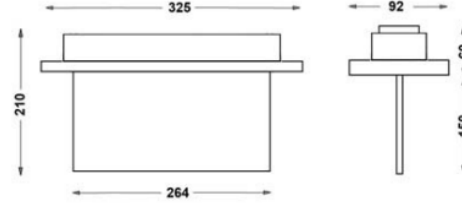

| Order Code | W | Lm | How to use | Battery | WxHxL (mm) | Ceiling Cutting (mm) | Kg |
|--------------------------|-----|----|------------|---------|------------|----------------------|------|
| 80522.000.021-IK021-IK21 | 1.2 | 20 | Çift Yüzlü | 3H | 92x210x264 | 295x50 | 0,33 |

