


APLED


82320

Apled is a recessed emergency lighting fixture for safely illuminating escape routes during power outages. Its compact design allows for aesthetic integration into the ceiling, while symmetrical or asymmetrical lens options adapt to various emergency lighting scenarios.

Thanks to its high-efficiency LED light source and long-lasting battery life, it provides reliable lighting in emergencies, creating an effective safety solution for corridors, stairwells, hotels, hospitals, offices, and public buildings. Its polycarbonate housing, status indicator, and easy-to-maintain design ensure long-lasting use. It offers an effective and aesthetically pleasing solution to emergency lighting needs in modern buildings.

RAL 9016

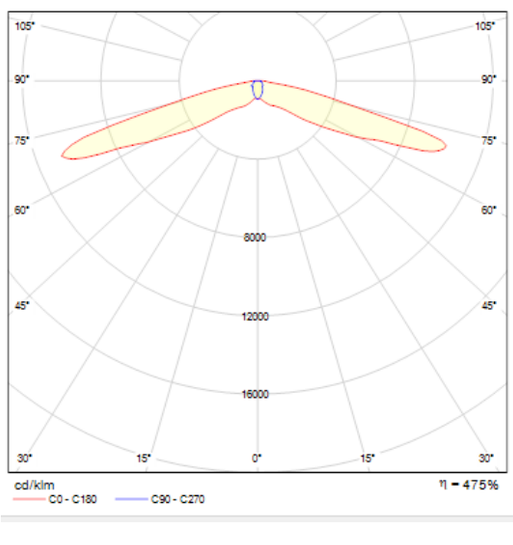

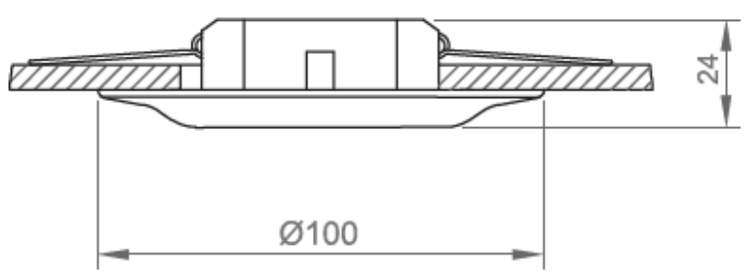

General Information	
Housing	Polycarbonate, green status LED indicator
Optics	Acrylic Lens
Emergency Working Hours	3 Hour
Insulation Class	Class II
Product Dimensions [mm]	Ø80
Mounting Type	Recessed
Mounting Part	Metal Spring

Electrical Info	
Power	3W
Battery	Charging time 24 hours
Driver	Industrial Ni-Cd
Light Source	SMD Power LED
Input Voltage	220-240V AC / 50-60 Hz
Ambient Temperature	-5°C / +40°C

Lighting Technology	
Status Indicator	Green LED

Optional
DALI / 1-10V
Lens Angle - 24°/ 28°

Order Code	W	Lm	Mode of Operation	Battery	(Ø) (mm)	Kg
82320.011.000	3	300	Kesintide	3H	Ø80	0,45

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com