


# Apled

Indoor Lighting - Emergency Lighting and Directional Luminaire



Colour Options   
Ral 9016

## TECHNICAL INFORMATION

**Housing** Polycarbonate (PC)  
**Frame** Foil Printed Acrylic Lens  
**Diffuser** Transparent Plexiglass  
**Paint** Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

**UGR Value** UGR ≤ 19  
**CRI** CRI ≥ 80

## ELECTRICAL


**Power (W)** 3W  
**Power Factor** >0.95  
**Light Source** SMD Power LED  
**Input Voltage** 220-240V AC / 50-60 Hz  
**LED Driver** High Efficiency Constant Current Output Rail  
**Ambient Temperature** -5°C / +40°C  
**LED Lifetime L80B50** >50.000 Hour

## OPTIONAL


- DALI - 1-10V DIM  
- Tunable White - Emergency Lighting Unit  
- CRI > 90 - 2700K ~ 6500K  
- Different RAL Color Options - Plug-in Connector  
- Class-II Protection Class - PIR Sensor  
- AC-DC Supply(MBS)

## ASSEMBLY

**Installation Type** Under Plaster  
**Mounting Apparatus** Metal Bracket

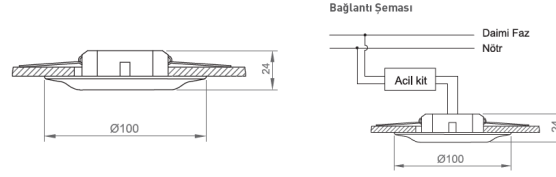

ÜRÜN YERLEŞİM BİLGİSİ (3W)					
Açık Alan Aydınlatması (min. 0,5 lux için) [Simetrik LENS]			Kaçış Yolu Aydınlatması (min. 1 lux için) [Asimetrik LENS]		
Montaj Yüksekliği (m)	Armatür Duvar Arası Mesafe (m)	Armatür Armatür Arası Mesafe (m)	Montaj Yüksekliği (m)	Armatür Duvar Arası Mesafe (m)	Armatür Armatür Arası Mesafe (m)
2,00	3,00	5,50	2,00	6,50	11,50
2,50	4,00	7,50	2,50	8,00	15,50
3,00	4,50	8,50	3,00	9,50	18,50
3,50	4,50	10,00	3,50	10,50	21,50
4,00	5,00	11,00	4,00	11,00	24,00



Order Code	W	Lm	Mode of Operation	Battery	( Ø ) (mm)	Kg
82320.011.000	3	300	Kesintide	3H	Ø80	0,45

