

Tetrad-060

Indoor Lighting - Spot Lighting



Colour Options



TECHNICAL INFORMATION

Housing	Metal Sheet
Diffuser	Opal with High Light Transmittance
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL




Power (W)	3,5-14W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Emergency Lighting Kit	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Energy Input Connector	- Class-II Protection Class
- PIR Sensor	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Metal Suspended Ceiling

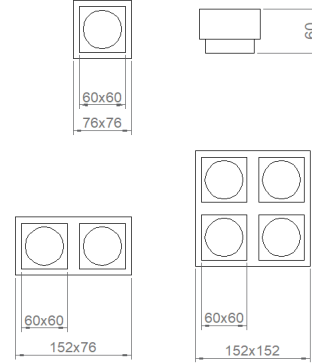

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
05348.22.30.002	3,5	250	3000	Ra>80	76x76x60	0,2
05348.22.40.002	3,5	260	4000	Ra>80	76x76x60	0,2
05348.22.30.005	7	500	3000	Ra>80	152x76x60	0,3
05348.22.40.005	7	520	4000	Ra>80	152x76x60	0,3
05348.22.30.010	14	1000	3000	Ra>80	152x152x60	0,5
05348.22.40.010	14	1041	4000	Ra>80	152x152x60	0,5

