

CORVUS-G


02130


Circular Recessed Luminaire

Corvus G Series offers a clean and contemporary lighting solution with its solid circular form and recessed mounting structure. Providing uniform and comfortable illumination, it integrates seamlessly with architectural surfaces while maintaining a strong visual identity. Featuring an aluminum body structure and slim profile details, Corvus G delivers a minimal aesthetic that complements contemporary office, commercial and social spaces.

Thanks to our in-house manufacturing capabilities, the Corvus G Series can be produced in various diameters, allowing project-specific solutions beyond standard sizes. With different diameter, color temperature and control options, it offers flexible lighting solutions tailored to architectural concepts and design requirements.

RAL 9016 RAL 9005 RAL 9006

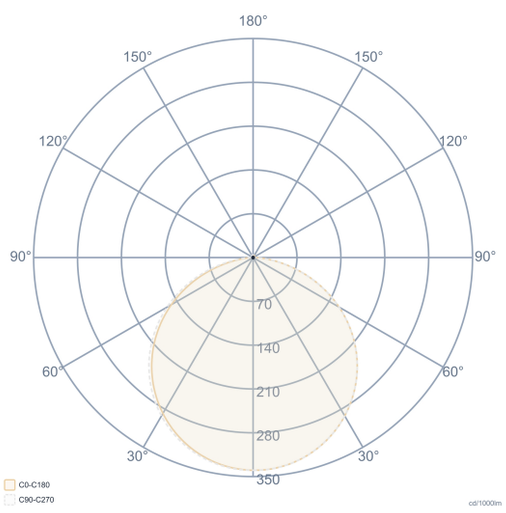

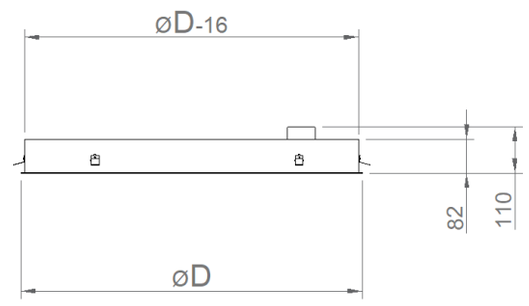

General Information	
Housing	Aluminum Extruded
Optics	Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø380/500/600/900/1200x82(H)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	20-96
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
02130.38.30.021	20	1920	3000	380x82	370	2,10
02130.38.40.022	20	2020	4000	380x82	370	2,10
02130.50.30.036	38	3430	3000	500x82	490	3,20
02130.50.40.039	38	3610	4000	500x82	490	3,20
02130.60.30.045	47	4460	3000	600x82	590	3,40
02130.60.40.047	47	4700	4000	600x82	590	3,40
02130.90.30.065	69	6220	3000	900x82	890	5,60
02130.90.40.069	69	6550	4000	900x82	890	5,60
02130.12.30.092	96	8665	3000	1200x82	1190	6,80
02130.12.40.097	96	9120	4000	1200x82	1190	6,80

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com