




## CORVUS-G

### 02130

#### Circular Recessed Luminaire

Corvus G Series offers a clean and contemporary lighting solution with its solid circular form and recessed mounting structure. Providing uniform and comfortable illumination, it integrates seamlessly with architectural surfaces while maintaining a strong visual identity. Featuring an aluminum body structure and slim profile details, Corvus G delivers a minimal aesthetic that complements contemporary office, commercial and social spaces.

Thanks to our in-house manufacturing capabilities, the Corvus G Series can be produced in various diameters, allowing project-specific solutions beyond standard sizes. With different diameter, color temperature and control options, it offers flexible lighting solutions tailored to architectural concepts and design requirements.

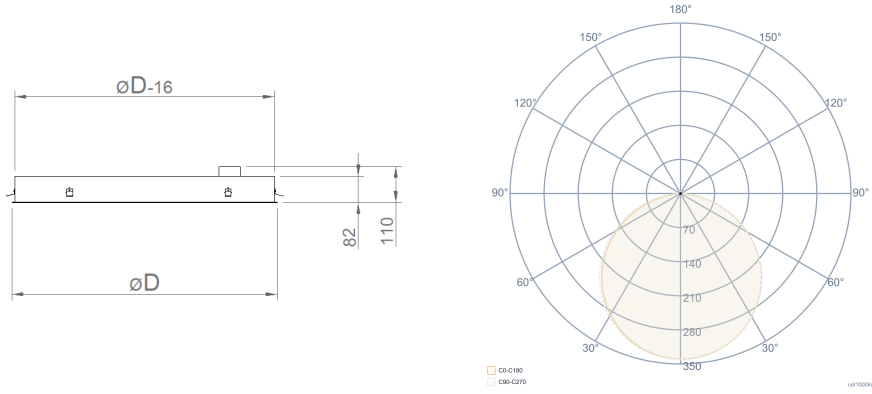

| General Information            |                             | Electrical Info            |                        | Lighting Technology                                                                                |              |
|--------------------------------|-----------------------------|----------------------------|------------------------|----------------------------------------------------------------------------------------------------|--------------|
| <b>Housing</b>                 | Aluminum Extruded           | <b>Power</b>               | 20-96                  | <b>Light Output Angle</b>                                                                          | 120°         |
| <b>Optics</b>                  | Opal Diffuser               | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>                                                                                   | UGR ≤ 22     |
| <b>Paint</b>                   | Electrostatic Powder Paint  | <b>Light Source</b>        | SMD Mid Power LED      | <b>CRI [Ra]</b>                                                                                    | CRI ≥ 80     |
| <b>Insulation Class</b>        | Class I                     | <b>Cabling</b>             | Halogen-Free           | <b>Color Bin Value</b>                                                                             | Mc Adams ≤ 3 |
| <b>Product Dimensions [mm]</b> | Ø380/500/600/900/1200x82(H) | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Optional</b><br>DALI / 1-10V<br>CRI>90 , 2700K~6500K , Tunable White<br>Emergency Lighting Unit |              |
| <b>Mounting Type</b>           | Recessed                    | <b>LED Driver</b>          | Constant Current       |                                                                                                    |              |
| <b>Mounting Part</b>           | Metal Bracket               | <b>Ambient Temperature</b> | -20°C / +50°C          |                                                                                                    |              |
|                                |                             | <b>LED Lifetime L70</b>    | >50.000 Hour           |                                                                                                    |              |

| Order Code      | W  | Lm   | CCT  | ØD x H (mm) | Ceiling Cutting (mm) | Kg   |
|-----------------|----|------|------|-------------|----------------------|------|
| 02130.38.40.022 | 20 | 2020 | 4000 | 380x82      | 370                  | 2,10 |