


ANEMON

05255


Performance in Facade Lighting

Anemon was developed to highlight the aesthetic value of architectural facades. Its slim body, various length options, and optical alternatives make it suitable for many applications, from historical buildings to modern architectural projects. With 10°, 25°, 45°, and 120° light distribution options, it provides narrow-angle accent lighting and wide-surface illumination.

It is compatible with different facade dimensions with length options of 340/650/970/1250 mm. Thanks to its IP67 protection class and IK09 impact resistance, it operates reliably in rain, dust, and harsh outdoor conditions. It is an aesthetic, durable, and high-performance facade lighting solution for building facades, bridges, historical structures, monuments, landscape elements, and architectural surfaces.

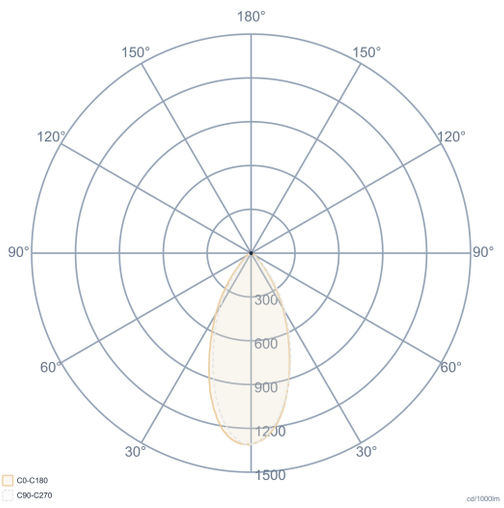





General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Extruded	**Power**	14-55W	**Light Output Angle**	10°-25°-45°-120°
Side Cover	Aluminum Injection	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 25
Glass	Tempered Clear Glass	**Light Source**	High Power LED	**CRI [Ra]**	CRI ≥ 80
Gasket	Silicon	**Cabling**	Halogen-Free	**Color Bin Value**	Mc Adams ≤ 3
Optics	Acrylic Lens	**Input Voltage**	220-240V AC / 50-60 Hz		
Paint	Matte Anodized Finish	**LED Driver**	Constant Current		
Insulation Class	Class I	**Ambient Temperature**	-20°C / +50°C		
Product Dimensions [mm]	58(W)x340(L)x70(H)	**LED Lifetime L70**	>102.000 Hour		
Mounting Type	Surface				

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
05255.34.30.015	14	1540	3000	58x340x70	1,50
05255.34.40.016	14	1600	4000	58x340x70	1,50
05255.65.30.030	29	3120	3000	58x650x70	2,90
05255.65.40.030	29	3230	4000	58x650x70	2,90
05255.97.30.040	43	4730	3000	58x970x70	4,40
05255.97.40.040	43	4860	4000	58x970x70	4,40
05255.12.30.060	55	6050	3000	58x1250x70	5,60
05255.12.40.060	55	6360	4000	58x1250x70	5,60

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com