


# ANEMON

## 05255

### Performance in Facade Lighting

Anemon was developed to highlight the aesthetic value of architectural facades. Its slim body, various length options, and optical alternatives make it suitable for many applications, from historical buildings to modern architectural projects. With 10°, 25°, 45°, and 120° light distribution options, it provides narrow-angle accent lighting and wide-surface illumination.

It is compatible with different facade dimensions with length options of 340/650/970/1250 mm. Thanks to its IP67 protection class and IK09 impact resistance, it operates reliably in rain, dust, and harsh outdoor conditions. It is an aesthetic, durable, and high-performance facade lighting solution for building facades, bridges, historical structures, monuments, landscape elements, and architectural surfaces.

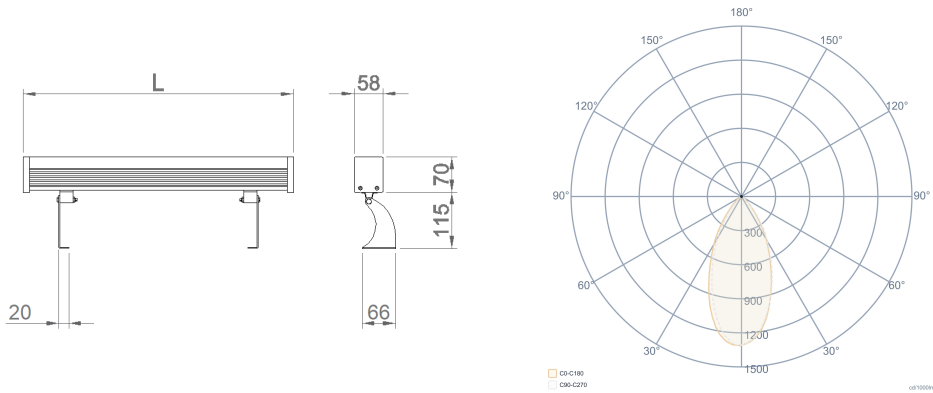

| General Information            |                       | Electrical Info            |                        | Lighting Technology       |                  |
|--------------------------------|-----------------------|----------------------------|------------------------|---------------------------|------------------|
| <b>Body &amp; Frame</b>        | Aluminum Extruded     | <b>Power</b>               | 14-55W                 | <b>Light Output Angle</b> | 10°-25°-45°-120° |
| <b>Side Cover</b>              | Aluminum Injection    | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>          | UGR ≤ 25         |
| <b>Glass</b>                   | Tempered Clear Glass  | <b>Light Source</b>        | High Power LED         | <b>CRI [Ra]</b>           | CRI ≥ 80         |
| <b>Gasket</b>                  | Silicon               | <b>Cabling</b>             | Halogen-Free           | <b>Color Bin Value</b>    | Mc Adams ≤ 3     |
| <b>Optics</b>                  | Acrylic Lens          | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Optional</b>           |                  |
| <b>Paint</b>                   | Matte Anodized Finish | <b>LED Driver</b>          | Constant Current       |                           |                  |
| <b>Insulation Class</b>        | Class I               | <b>Ambient Temperature</b> | -20°C / +50°C          |                           |                  |
| <b>Product Dimensions [mm]</b> | 58(W)x340(L)x70(H)    | <b>LED Lifetime L70</b>    | >50.000 Hour           |                           |                  |
| <b>Mounting Type</b>           | Surface               |                            |                        |                           |                  |

| Order Code      | W  | Lm   | CCT  | WxLxH (mm) | Kg   |
|-----------------|----|------|------|------------|------|
| 05255.97.30.040 | 43 | 4730 | 3000 | 58x970x70  | 4,40 |

