




Space - Facade Lighting

Outdoor Lighting - Facade Lighting

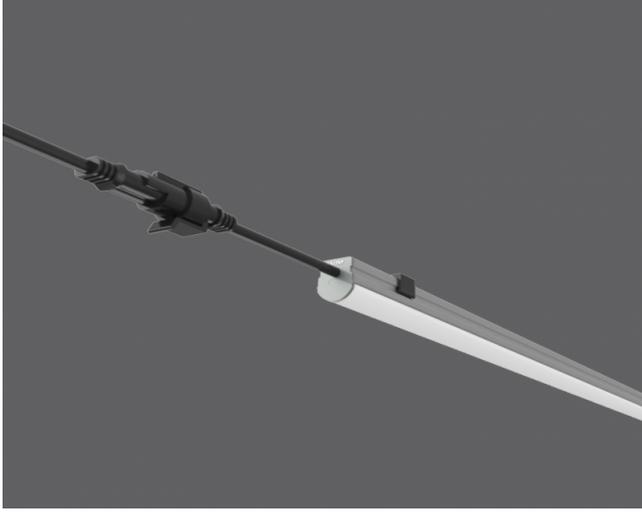

Colour Options



Ral 9006

TECHNICAL INFORMATION

Housing	Aluminum profile
Optics	High Light Transmittance Opal Polycarbonate Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	7-14W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI

ASSEMBLY

Installation Type Surface Mounted



Order Code	W	Lm	Lm	CRI	WxLxH (mm)	Kg
08131.05.30.007	7	750	3000	Ra>80	21x515x22	0,25
08131.05.40.007	7	780	4000	Ra>80	21x515x22	0,25
08131.10.30.014	14	1400	3000	Ra>80	21x1015x22	0,40
08131.10.40.014	14	1450	4000	Ra>80	21x1015x22	0,40

