




Space - Facade Lighting

Outdoor Lighting - Facade Lighting

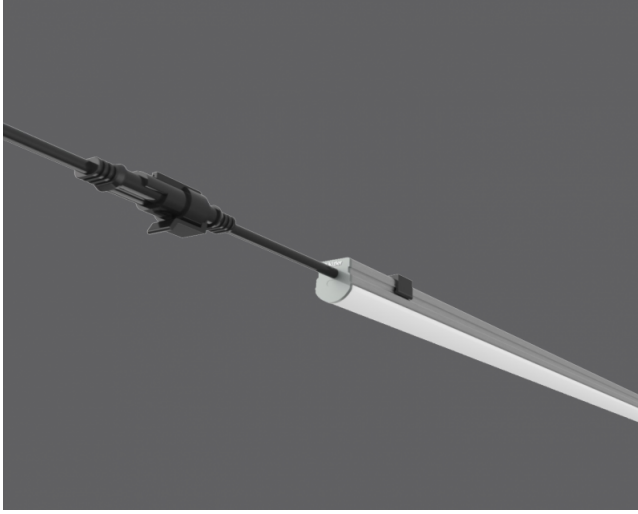

TECHNICAL INFORMATION

Housing	Aluminum profile
Optics	High Light Transmittance Opal Polycarbonate Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	7-14W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI

ASSEMBLY

Installation Type Surface Mounted



Order Code	W	Lm	Lm	CRI	WxLxH (mm)	Kg
08131.05.30.007	7	750	3000	Ra>80	21x515x22	0,25
08131.05.40.007	7	780	4000	Ra>80	21x515x22	0,25
08131.10.30.014	14	1400	3000	Ra>80	21x1015x22	0,40
08131.10.40.014	14	1450	4000	Ra>80	21x1015x22	0,40

