





GLOW WIRE  
650°C


IP  
65

IK  
08



# Space - Facade Lighting

Outdoor Lighting - Facade Lighting

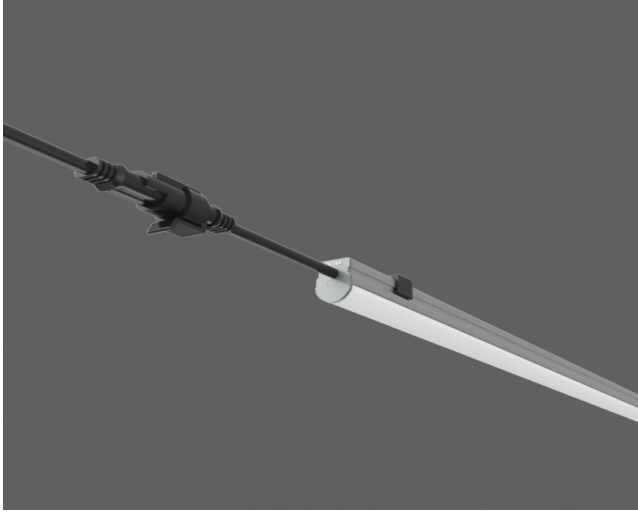

Colour Options



Ral 9006

## TECHNICAL INFORMATION

<b>Housing</b>	Aluminum profile
<b>Optics</b>	High Light Transmittance Opal Polycarbonate Diffuser
<b>Paint</b>	Electrostatic Powder Paint

## OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	Symmetrical
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	UGR ≤ 22
<b>CRI</b>	CRI ≥ 80
<b>Color Bin Value</b>	Mc Adams ≤ 3

## ELECTRICAL



<b>Power (W)</b>	7-14W
<b>Power Factor</b>	>0.95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V AC / 50-60 Hz
<b>LED Driver</b>	High Efficiency Constant Current Output
<b>Ambient Temperature</b>	-20°C / +50°C
<b>LED Lifetime L80B50</b>	>50.000 Hour

## OPTIONAL

DALI

## ASSEMBLY

**Installation Type** Surface Mounted



Order Code	W	Lm	Lm	CRI	WxLxH (mm)	Kg
08131.05.30.007	7	750	3000	Ra>80	21x515x22	0,25
08131.05.40.007	7	780	4000	Ra>80	21x515x22	0,25
08131.10.30.014	14	1400	3000	Ra>80	21x1015x22	0,40
08131.10.40.014	14	1450	4000	Ra>80	21x1015x22	0,40

