



Anemon-1250

Outdoor Lighting - Facade Lighting

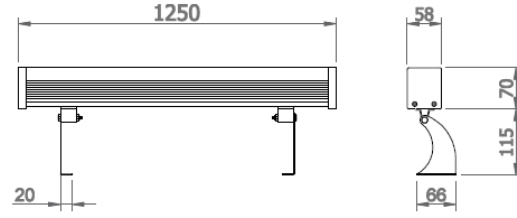

| Order Code | W | Lm | CCT | CRI | WxLxH (mm) | Kg |
|-----------------|----|------|------|-------|------------|-----|
| 05255.12.30.060 | 55 | 6050 | 3000 | Ra>80 | 58x1250x70 | 5,6 |
| 05255.12.40.060 | 55 | 6360 | 4000 | Ra>80 | 58x1250x70 | 5,6 |

TECHNICAL INFORMATION

| | |
|------------------|----------------------------|
| Housing | Extruded Aluminum Profile |
| Frame | Matte Anodized Finish |
| Glass | Tempered Clear Glass |
| Reflector | Acrylic Optical Lens |
| Paint | Electrostatic Powder Paint |

OPTICAL SPECIFICATIONS

| | |
|---------------------------|------------------|
| Light Distribution | Symmetrical |
| Light Output Angle | 10°-25°-45°-120° |
| UGR Value | UGR ≤ 25 |
| CRI | CRI ≥ 80 |
| Color Bin Value | Mc Adams ≤ 3 |

ELECTRICAL

| | |
|----------------------------|---|
| Power (W) | 55W |
| Power Factor | >0.95 |
| Light Source | High Power LED |
| Cabling | Halogen-Free |
| Input Voltage | 220-240V / 50-60 Hz |
| LED Driver | High Efficiency Constant Current Output |
| Ambient Temperature | -20°C / +50°C |
| LED Lifetime L80B50 | >50.000 Hour |

OPTIONAL

| | |
|-------------------------------|---------------------------|
| - DALI | - 1-10V DIM |
| - Tunable White | - Emergency Lighting Unit |
| - 2700K ~ 6500K | - CRI > 90 |
| - Different RAL Color Options | - Plug-in Connector |
| - Class-I Protection Class | - AC-DC Supply(MBS) |

ASSEMBLY

Installation Type Surface Mounted

