
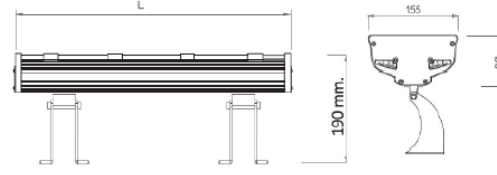


# Potent-F

Outdoor Lighting - Facade Lighting



Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
07304.02.30.023	22	2350	3000	Ra>80	155x200x80	2,2
07304.02.40.025	22	2500	4000	Ra>80	155x200x80	2,2
07304.03.30.047	43	4700	3000	Ra>80	155x370x80	3,3
07304.03.40.050	43	5000	4000	Ra>80	155x370x80	3,3
07304.07.30.095	86	9500	3000	Ra>80	155x700x80	4,9
07304.07.40.098	86	9800	4000	Ra>80	155x700x80	4,9

## TECHNICAL INFORMATION

<b>Housing</b>	Die-cast aluminum with electrostatic coating
<b>Optics</b>	Clear optical lens
<b>Glass</b>	Tempered and clear
<b>LED Lifetime</b>	50.000 hours
<b>L80B50</b>	

## OPTICAL SPECIFICATIONS

<b>Light Distribution</b>	
<b>Light Output Angle</b>	120°
<b>UGR Value</b>	80
<b>Color Bin Value</b>	Mc Adams < 3
<b>Color Temperature (CCT)</b>	3000K/4000K

## ELECTRICAL

<b>Power (W)</b>	22-86W
<b>Power Factor</b>	>95
<b>Light Source</b>	SMD Mid Power LED
<b>Cabling</b>	Halogen-Free
<b>Input Voltage</b>	220-240V / 50-60 Hz

## OPTIONAL

DALI  
Emergency Lighting Unit

## ASSEMBLY

**Installation Type** Surface Mounted

