ikizler
"worth the light"

Epic

Indoor Lighting - Spot Lighting

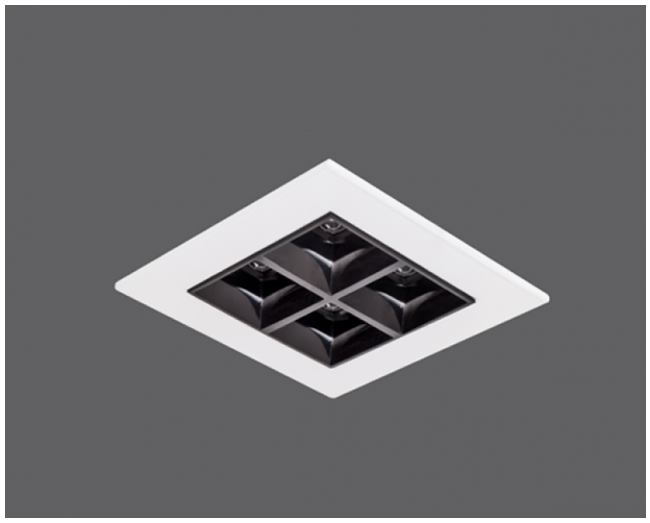

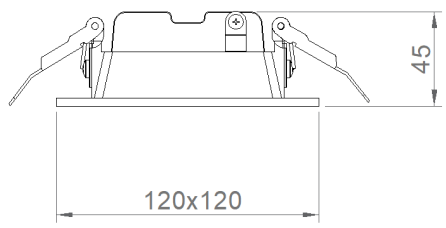



Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)
05246.11.40.021	20	2100	80º	4000	Ra>80	120x120x45	100x100

Colour Options Ral 9016 | Ral 9006 | Ral 9005

TECHNICAL INFORMATION

Housing Aluminum Injection
Reflector Anti-Glare Optics
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 80°
UGR Value UGR ≤ 19
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 10-20W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halojen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver Yüksek Verimli Sabit Akım Çıkışlı
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Under Plaster
Mounting Apparatus Steel Spring

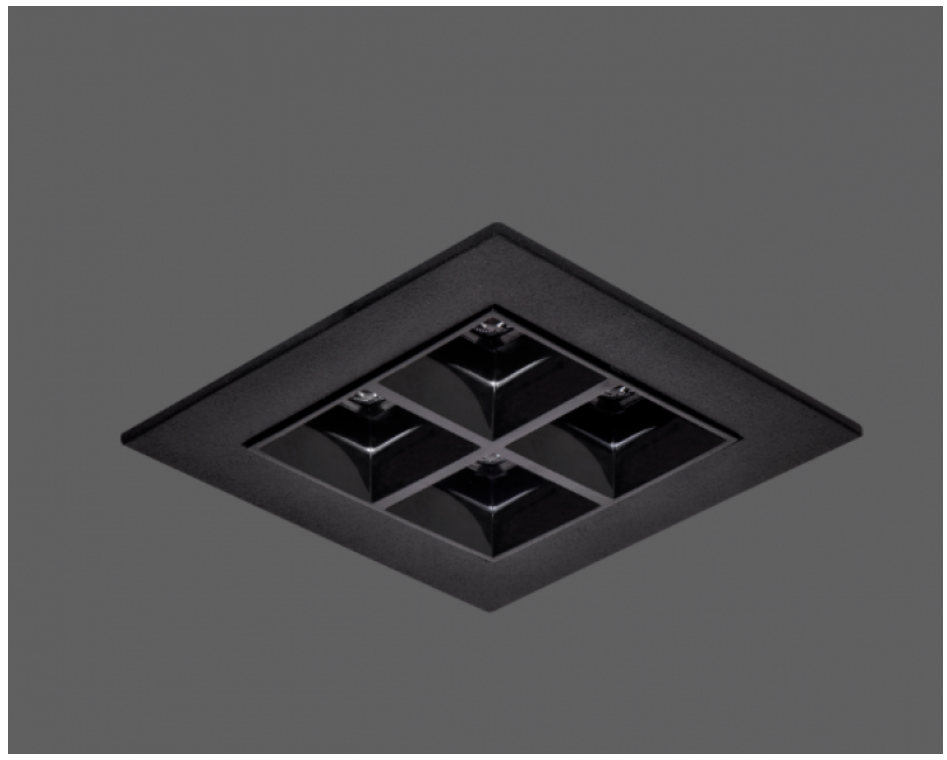

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com