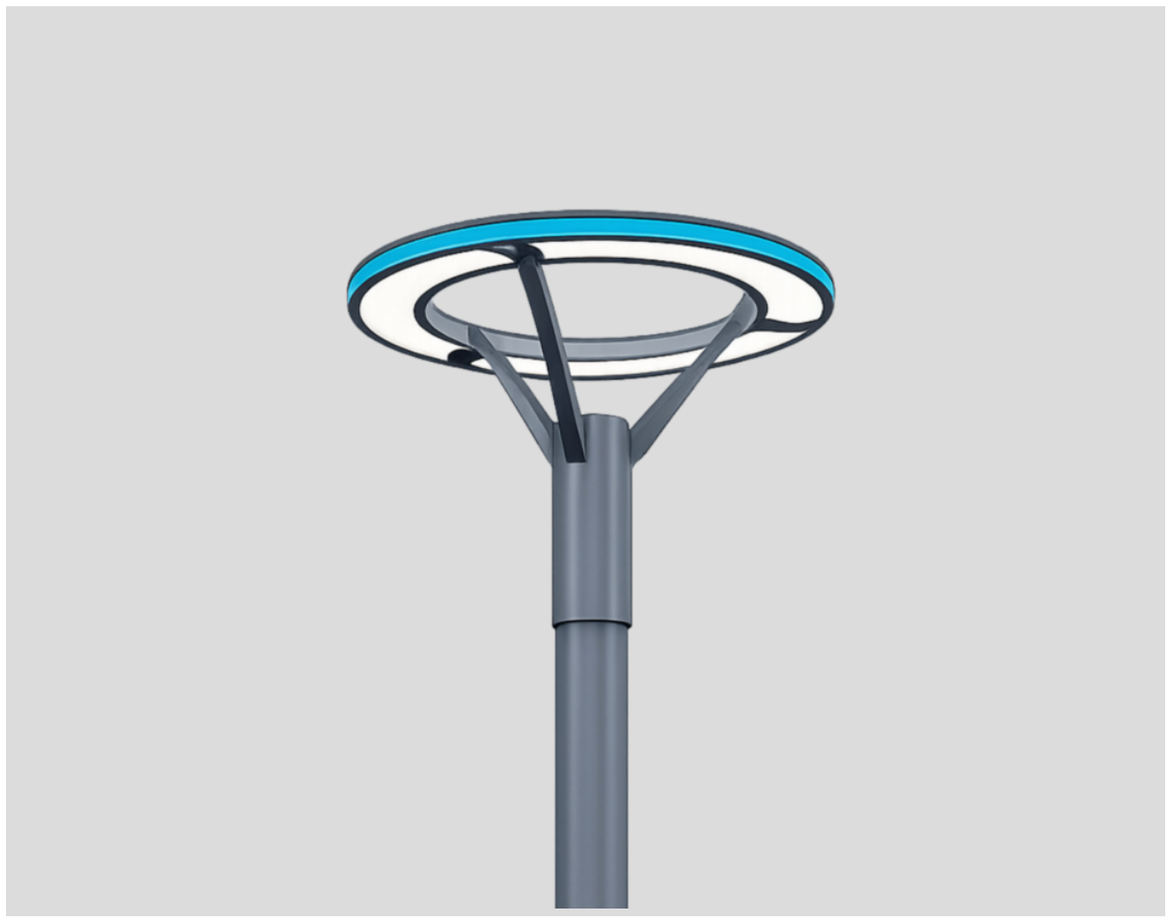



RAL 7016


ALFOT

09494

Modern Design, Homogeneous Lighting

Alfot is our environmental lighting solution developed for parks, walkways, squares, campuses, and landscaped areas, featuring a modern design and homogeneous light distribution. Its 120° wide light distribution enhances visual comfort, while its IP65 protection class, IK08 impact resistance, and corrosion-resistant aluminum housing ensure long-lasting and reliable use in outdoor conditions. Its unique ring shape gives environmental lighting a modern and aesthetic identity, while its high performance adds value to your projects.

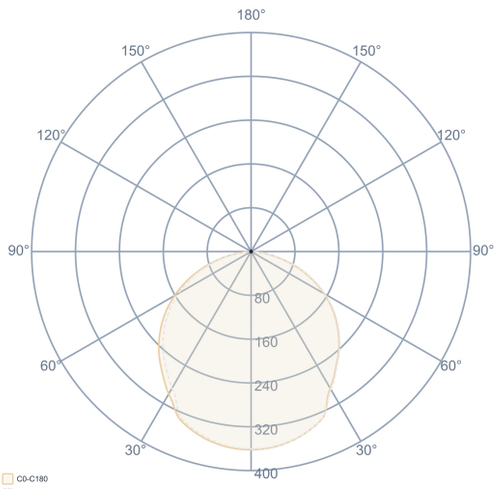

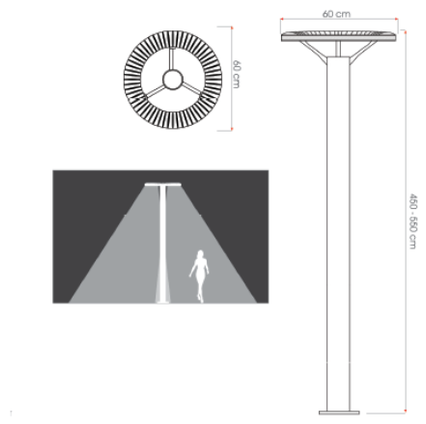

General Information	
Body & Frame	Corrosion Resistant Cast Aluminum
Optics	Opal lens
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø600x3500-4000-6000
Mounting Type	Surface

Electrical Info	
Power	40-75W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØDx(H)
09494.63.60.042	40	4080	6000	Ø600x3500
09494.64.60.075	60	7190	6000	Ø600x4000
09494.65.60.089	75	8560	6000	Ø600x5000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com