

RAL 7016


ANTHILL-B


09333

Elegant Ambient Lighting

Anthill-B is a decorative bollard lighting solution we developed for walkways, parks, gardens, landscapes, and building surroundings, with its modern cylindrical form and compact design. Thanks to its symmetrical and asymmetrical optical options, it provides light distribution suitable for different application needs, creating safe and visually comfortable outdoor spaces.

Its corrosion-resistant housing, IP65 protection class, and IK08 impact resistance offer long-lasting and reliable performance in challenging outdoor conditions. Combining simple design with aesthetic appeal and high durability, it adds value to modern environmental projects.

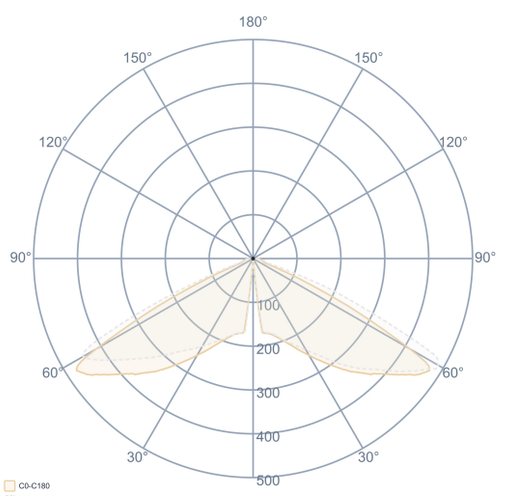

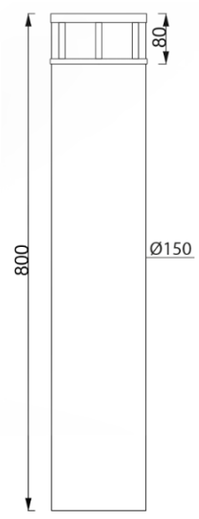

General Information	
Housing	Corrosion Resistant Cast Aluminum
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø150x800mm
Mounting Type	Surface

Electrical Info	
Power	9W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	2x25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØDx(H)
09333.18.60.009	9	940	6000	Ø150x800

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com