


ANTHILL-K


09333

Durable and Aesthetic

With its compact housing, it provides controlled and comfortable lighting for walkways, landscaped areas, and outdoor living spaces. Symmetrical and asymmetrical optical options, a durable steel housing, and IP65 protection class offer long-lasting performance outdoors, while its modern design adds an aesthetic touch to the environment.

RAL 7016

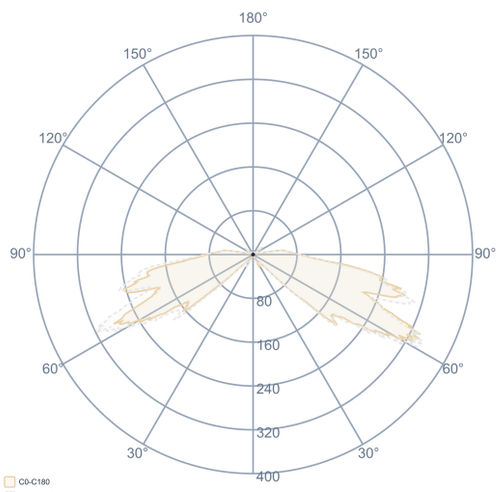



General Information	
Housing	Corrosion-resistant cast aluminum.
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	Ø150x300mm
Mounting Type	Surface

Electrical Info	
Power	6W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	2x25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	ØDx(H)
09333.13.60.006	6	620	6000	Ø150x300

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com