

RAL 7016


FINGER-L


09332

Modern Bollard Lighting

Finger-L combines aesthetic appeal with high-performance lighting in parks, walkways, landscaped areas, campuses, and building surroundings with its elegant design. Thanks to its symmetrical and asymmetrical optical options, it provides safe, comfortable, and balanced outdoor lighting by offering light distribution tailored to different project needs.

Its corrosion-resistant aluminum extrusion housing, IP65 protection class, and IK08 impact resistance ensure long-lasting use in harsh outdoor conditions. With its minimalist design that harmonizes with modern architecture and its powerful light performance, it adds value to environmental lighting projects.

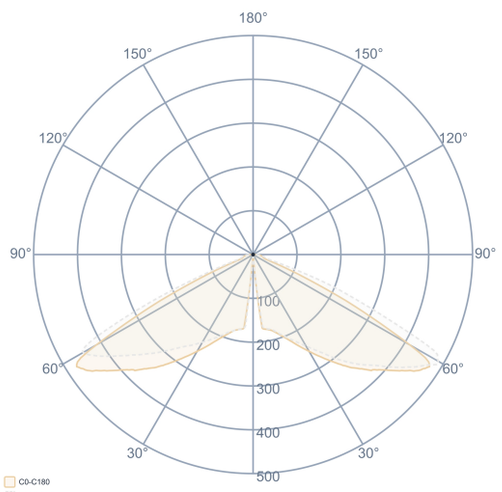



General Information	
Housing	Corrosion Resistant Cast Aluminum
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	150(W) x 3000(L) x 150(H)
Mounting Type	Surface

Electrical Info	
Power	30W
Power Factor	>0.95
Light Source	High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-30°C / +60°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	2x25°
UGR Value	UGR ≤ 25
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)
09332.13.50.024	30	2400	5000	150x150x3000

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com